

## Chemical and physical pretreatments of fruits and vegetables: Effects on drying characteristics and quality attributes – a comprehensive review

Li-Zhen Deng, Arun S. Mujumdar, Qian Zhang, Xu-Hai Yang, Jun Wang, Zhi-An Zheng, Zhen-Jiang Gao & Hong-Wei Xiao

To cite this article: Li-Zhen Deng, Arun S. Mujumdar, Qian Zhang, Xu-Hai Yang, Jun Wang, Zhi-An Zheng, Zhen-Jiang Gao & Hong-Wei Xiao (2019) Chemical and physical pretreatments of fruits and vegetables: Effects on drying characteristics and quality attributes – a comprehensive review, *Critical Reviews in Food Science and Nutrition*, 59:9, 1408-1432, DOI: [10.1080/10408398.2017.1409192](https://doi.org/10.1080/10408398.2017.1409192)

To link to this article: <https://doi.org/10.1080/10408398.2017.1409192>



Published online: 20 Dec 2017.



Submit your article to this journal [↗](#)



Article views: 927



View related articles [↗](#)



View Crossmark data [↗](#)



Citing articles: 31 View citing articles [↗](#)



# Chemical and physical pretreatments of fruits and vegetables: Effects on drying characteristics and quality attributes – a comprehensive review

Li-Zhen Deng<sup>a</sup>, Arun S. Mujumdar<sup>b</sup>, Qian Zhang<sup>c</sup>, Xu-Hai Yang<sup>c</sup>, Jun Wang<sup>a</sup>, Zhi-An Zheng<sup>a</sup>, Zhen-Jiang Gao<sup>a</sup>, and Hong-Wei Xiao<sup>a</sup>

<sup>a</sup>College of Engineering, China Agricultural University, Beijing, China; <sup>b</sup>Department of Bioresource Engineering, McGill University, Ste. Anne de Bellevue, Quebec, Canada; <sup>c</sup>College of Mechanical and Electrical Engineering, Shihezi University, Shihezi, China

## ABSTRACT

Pretreatment is widely used before drying of agro-products to inactivate enzymes, enhance drying process and improve quality of dried products. In current work, the influence of various pretreatments on drying characteristics and quality attributes of fruits and vegetables is summarized. They include chemical solution (hyperosmotic, alkali, sulfite and acid, etc.) and gas (sulfur dioxide, carbon dioxide and ozone) treatments, thermal blanching (hot water, steam, super heated steam impingement, ohmic and microwave heating, etc), and non-thermal process (ultrasound, freezing, pulsed electric field, and high hydrostatic pressure, etc). Chemical pretreatments effectively enhance drying kinetics, meanwhile, it causes soluble nutrients losing, trigger food safety issues by chemical residual. Conventional hot water blanching has significant effect on inactivating various undesirable enzymatic reactions, destroying microorganisms, and softening the texture, as well as facilitating drying rate. However, it induces undesirable quality of products, e.g., loss of texture, soluble nutrients, pigment and aroma. Novel blanching treatments, such as high-humidity hot air impingement blanching, microwave and ohmic heat blanching can reduce the nutrition loss and are more efficient. Non-thermal technologies can be a better alternative to thermal blanching to overcome these drawbacks, and more fundamental researches are needed for better design and scale up.

## KEYWORDS

Pretreatment; drying; dipping; thermal blanching; non-thermal pretreatment

## 1. Introduction

As incomes and urbanization increased, global food-consumption dietary is transferring to protein-rich Western diets, higher in meats, refined sugars, fats and oils (Popkin et al., 2012). The global dietary shifts are threatening human health, environmental sustainability, and biodiversity (Tilman & Clark, 2014). While increasing fruits and vegetables consumption can mitigate this problem as they provide substantial health benefits and reduce global agricultural greenhouse gas emissions, reduce deforestation and can help prevent many diet-related chronic diseases, such as obese, type II diabetes, coronary heart disease and some cancers (Westhoek et al., 2014; Stehfest, 2014).

Fresh fruits and vegetables are perishable and difficult to preserve due to their high moisture content and tender texture. Drying is one of the most common preservation methods for extending the shelf life of fruits and vegetables by reducing the water content to a level so as to prevent the growth and reproduction of microorganisms and to inactivate many of the moisture-mediated deteriorative reactions (Mujumdar, 2014; Omolola et al., 2017). Drying extensively reduces the weight and volume of vegetables and brings benefits, such as minimizing packing, storage, and transportation costs (Kamiloglu et al., 2016). In addition, drying agro-products into low water content

provides new products patterns such as vegetable crisps with unique texture and physical properties.

Fruits and vegetables are usually subjected to physical or chemical pretreatment before drying to shorten the drying time, reduce the energy consumption and preserve the quality of products (Yu et al., 2017). The drying rate and quality of products do largely relate to the pretreatments carried out before drying process (Fernandes & Rodrigues, 2008).

Generally, agro-products drying is a time and energy consuming process, pretreatment effectively enhances drying process. Ultrasonic waves has been used to enhance mass transfer by creating microscopic channels in solid material through unique mechanical fluctuation and cavitation effect that make the moisture transport easier (Mothibe et al., 2010). Several studies have confirmed that ultrasonic wave pretreatment could increase the effective diffusivity of water in the plant tissues, and reduce drying time by 10%–30% (Azoubel et al., 2010; Çakmak et al., 2016; Fernandes & Rodrigues, 2008). Osmotic dehydration has been widely applied before drying to reduce the initial water content, and then decrease drying time and energy consumption of fruits and vegetables (Rodrigues & Fernandes, 2007a; Ruiz-López et al., 2010). Many kinds of fruits, such as grapes, plums, and blueberries, are covered by a layer wax on the skin, which impedes water diffusion through the

peel. Dipping in chemical additive solution, such as sodium hydroxide, ethyl or methyl oleate emulsions dissolves the waxy layer, and consequently increases the drying rate (Bingol et al., 2012; Doymaz & Pala, 2005; Sacilik et al., 2006). Blanching enhances the drying rates due to structure softening and cell wall destruction, leading to lesser resistance to moisture movement during drying (Severini, et al., 2005; Leeratanarak et al., 2006), which reduced the drying time and energy consumption of sour cherry by 61.83%–74.73% and 43.35%–77.69%, respectively (Gazor et al., 2014).

Color is one of the most important quality attributes of foods as it is critical in the acceptance of food products by consumers. It underwent a serious deterioration during drying, largely caused by enzymatic and non-enzymatic browning. The fresh fruits and vegetables with high content of polyphenols, polyphenol oxidase (PPO) and peroxidase (POD) are prone to enzymatic browning. Non-enzymatic browning includes a wide number of reactions such as Maillard reaction, caramelisation, chemical oxidation of phenols, and maderisation (Manzocco et al., 2000). Thermal blanching, such as hot water, steam and microwave blanching, is widely applied to inactivate the enzymes responsible for unacceptable darkening and off-flavors, thus preserving products' color (Araújo et al., 2016; Bai et al., 2013; Severini et al., 2005). In addition, sulfuration pretreatment is one of the most frequently used methods for preventing browning, as it retards both enzymatic and non-enzymatic browning reactions (Li & Zhao, 2006; Miranda et al., 2009), improve the color of products (Ahmed et al., 2010 a & b; Davoodi et al., 2007). Furthermore, osmotic dehydration can improve the color of mango chips and banana slices, as the monosaccharide present in the plant tissue, which is a reactive substance for browning reaction, is leached out with simultaneous sucrose uptake during osmotic dehydration (Tabtiang et al., 2012; Zou et al., 2013).

Fruits and vegetables are excellent sources of antioxidant compounds such as vitamins (especially vitamins C and E), flavonoids and carotenoids, which are expected to offer protection against cardiovascular diseases, cancer and age-related degenerative transformations, as shown by epidemiological studies (Schieber et al., 2001). Pretreatments performed before drying are desired to enhance retention of the antioxidant compounds. For example, microwave blanching maintained the anthocyanin level of sweet potato (Liu et al., 2015), mitigated ascorbic acid degradation of green asparagus (Hong & Lu, 2012). Ultrasonic pretreatment preserved the phenolic compounds in mushroom (Çakmak et al., 2016). Pulsed electric fields pretreatment yielded greater retention of carotenoid pigments of red pepper (Won et al., 2014), inactivated ascorbic acid oxidase by thus to minimize vitamin C degradation of dried crystal radish (Liu et al., 2016). High hydrostatic pressure pretreatment showed an improvement of the antioxidant activity of the aloe (Vega-Gálvez et al., 2011). In addition, pretreatment also improve rehydration capacity and crispness of dried products (Hiranvarachat et al., 2011; Rastogi, 2012; Doymaz & Özdemir, 2014), and make for forming a uniform microstructure of tissues (Jiang et al., 2015).

In sum, proper pretreatments can reduce the initial water content, or modify the properties of tissue in some extent, thereby increasing the drying rate, improving the quality of

material; and inhibit the bio-enzymes, then minimize possible deterioration reactions during drying and subsequent storage. Therefore, the objectives of this review were to present an overview of the advances in pretreatment technologies (Fig. 1) of fruits and vegetables before drying, and evaluate the effects of different pretreatments on drying characteristics and quality attributes of products, as well as discuss the future research opportunities.

## 2. Chemical pretreatments

### 2.1 Liquid phase

#### 2.1.1 Hyperosmotic solution

Osmotic dehydration is one of the most widely practiced pretreatments prior to drying to reduce energy consumption and improve food quality (Torreggiani, 1993). It involves the immersion of material in hypertonic solution (mainly sugar or salt) for several hours. During osmotic pretreatment, plant cellular structure acts as a semi-permeable membrane, counter-current transfer of mass occurs: the solute flows into the products, while moisture is transferred from the interior to the hypertonic solution (Cieurzyńska et al., 2016), as shown in Fig. 2. The driving force of water removal from food material to the osmotic solution is the osmotic pressure difference between food material and the hypertonic solution (Corzo & Gomez, 2004).

Osmotic dehydration removes 10%–70% of water from fruits and vegetables at ambient temperature without causing phase changes, which offers an alternative way to reduce drying time, and mitigate degradation of bioactive compounds from thermal effects of drying (Cieurzyńska et al., 2016; Rastogi et al., 2002), as shown in Table 1. For example, Rodrigues & Fernandes (2007a) found that osmotic dehydration pretreatment with sucrose and mannitol reduced the drying time up to 6.3 h compared to un-pretreated samples. Ghosh et al. (2006) observed that the carrot slices pretreated with osmotic dehydration and then dried in hot air, obtained a better acceptability of color, appearance and odor compared to the control samples.

During osmotic processing, besides of properties of the material, the rate of mass transfer were greatly influenced by the process conditions, such as processing temperature, concentration of solution, solution to solid mass ratio, and etc. (Ahmed et al., 2016).

Increasing the concentration of solution, generally leads to an increase in the water mass transfer coefficient between the material and the solution owns to the increase in the osmotic pressure gradient. Ruiz-López et al. (2010) reported that, chayote parallelepipeds pretreated with 10% and 25% NaCl solutions (w/w), produced reduction in the initial moisture content of 2.85 and 5.79 kg/kg (db), in drying time of 48.0% and 62.1%, respectively. Similar results were reported by Oliveira et al. (2016) and Brochier et al. (2015) for yacon dehydration. However, the sucrose in excess may increase the viscosity of solution, which may generate an additional resistance for the mass enter the fruit. Teles et al. (2006) found that the mass transfer coefficient for 45%, 55% and 65% sucrose were 42.10, 23.99 and 20.73 h/m<sup>2</sup>, respectively, confirmed the mass transfer coefficients were decreased with the increase of osmotic solution

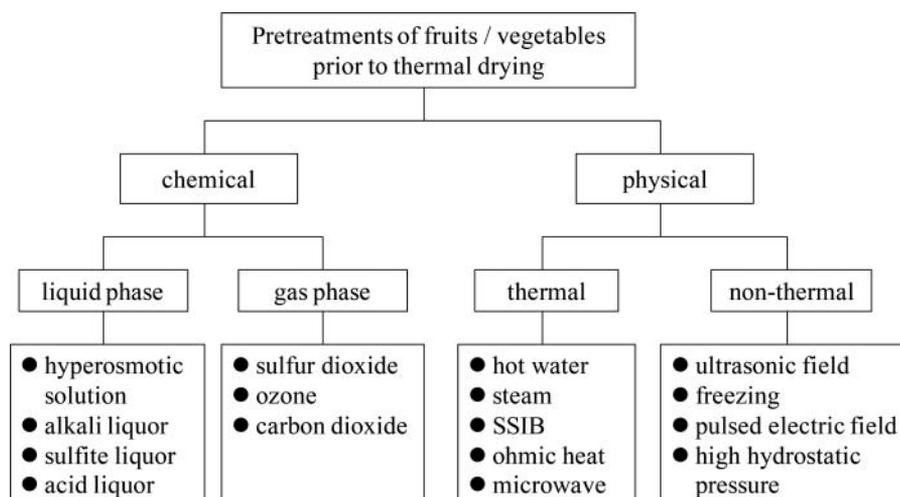


Figure 1. Pretreatment methods of fruits or vegetables prior to thermal drying.

concentration during osmotic dehydration of melons. Besides, in order to avoid formation of local concentration gradients, a constant mechanical agitation generally applied to homogenize the osmotic solution (Fan et al., 2008).

Moreover, the solution to solid mass ratio is an important factor, because of low values of this parameter may cause the excessive dilution of the osmotic solution, and then lead to local reduction of the osmotic driving force during the process. Teles et al. (2006) found that the water mass transfer coefficient between the melon fruits and the osmotic solution was higher for the weight ratio of osmotic solution to fruit was 4:1 than that of 2:1. Similar results were observed by Valdez-Fragoso et al. (2007) for dehydration of pepper. Oliveira et al. (2016) used a brine to sample ratio at least 25:1 during dehydration of yacon slices, to avoid significant dilution of the solution by water removal, however, it needs a great amount of solution.

Furthermore, the type of osmotic substance had significant effect on the mass diffusion coefficients, since the smaller molecular size enables its greater mobility in food (Oliveira et al., 2016). The mass loss rate of yacon treated with sorbitol solution was lowered than the glycerol, attributed to the sorbitol (molar mass = 182.17 g/mol) has lower permeability in the food matrix than glycerol (molar mass = 92.09 g/mol) (Brochier et al., 2015).

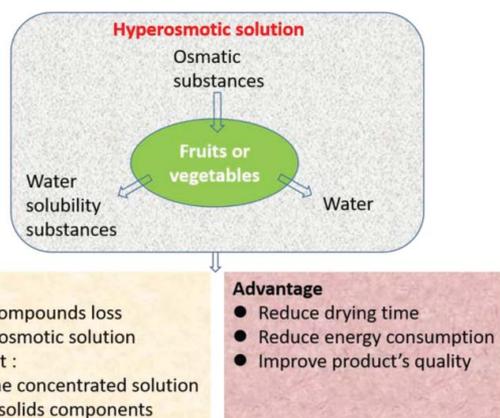


Figure 2. Osmotic dehydration of vegetables or fruits.

Additionally, increasing the temperature generally reduces the solution viscosity, gives rise to a higher membrane permeability, and then reducing the external resistance to mass transfer (Oliveira et al., 2016). Brochier et al. (2015) found that, increase of temperature caused a significant increase in effective diffusivity during osmotic dehydration of yacon. However, high temperatures may cause deterioration in texture and nutrition of the food (Brochier et al., 2015; Mercali et al., 2011).

Besides, combined with other techniques, such as vacuum, ultrasound and hydrostatic pressure, can enhance the mass transfer rate and quality of dried products (Valdez-Fragoso et al., 2007; Chandra & Kumari, 2015; Ciurzyńska et al., 2016). For example, osmotic dehydration combined with vacuum can increase the dehydration process and prevent discoloration caused by oxidative and enzymatic browning of fruits without loss of antioxidants as the oxygen was expelled from the environment (Zhao & Xie, 2004). Moreno et al. (2004) and Deng & Zhao (2008) observed similar phenomenon in osmotic dehydration of papaya and apple, respectively.

However, osmotic dehydration also has adverse effects on the drying rate of some products, attributes to the increased resistance to water flux caused by shrinkage and solutes uptake (Nieto et al., 2001). Azoubel et al. (2009) and Nieto et al. (2001) observed that, the drying rates of osmotic cashew apple and mangos decreased, which aggravated by the increase of glucose concentration. Moreover, osmotic dehydration caused a loss of low molecular weight substances migrating from tissue into osmotic solution, i.e., minerals, vitamins and pigments (Ciurzyńska et al., 2016). Azoubel et al. (2009) found that, osmotic pretreated cashew apple showed the vitamin C losses of 18.7% due to the leaching of vitamin C from the product to the osmotic solution. Novaković et al. (2011) also observed that the phenolic compounds and antioxidant activity of raspberry were decreased after osmotic dehydration. Meanwhile, osmotic dehydration pretreatment caused decrease of the hardness and increase of the darkness of dried mandarin product (Pattanapa et al., 2010).

In summary, though osmotic dehydration was often considered as a good energy saving method for the partial non-evaporating removal of water from foods, but there are also some

Table 1. Effects of chemical solution pretreatments on drying characteristics and quality attributes of fruits and vegetables.

Methods	Product	Pretreatment process	Drying methods	Main conclusion	Reference
Osmotic solution	Chayote	Dipped in 25% (w/w) NaCl at 25 °C for 3 h, solution to fruit mass ratio of 4:1.	Hot air drying	Initial moisture content decreased by 17%, drying time reduced by 20–65%.	Ruiz-López et al., 2010
	Mellon	Dipped in 70°Brix sucrose at 42.5 °C for 1 h, solution to fruit mass ratio of 4:1.	Hot air drying	Cells breakdown, effective water diffusivity increased, drying time decreased by 20%.	Fan et al., 2008
	Potato	Dipped in an osmotic solution with sugar (70% w/w) and salt (5% w/w) at 42.5 °C.	Hot air drying	A 45% increase in the water mass transfer coefficient, total processing time decreased.	Rodrigues & Fernandes, 2006
		Pretreated with salt solution (5, 10, 15% w/w) or sucrose solution (30, 40, 50% w/w) at 20 °C for 6 h.	Microwave freeze-drying	Initial moisture content reduced up to 32% – 72% after OD; about 35%–65% reduction in drying time; 76%–676% increase in hardness and 42%–558% increase in crispness when OD used.	Wang et al., 2010
	Carrot	Dipped in sugar solution (50° Brix) containing 5% salt concentration and 0.1 sodium metabisulphite for 1 h.	Hot-air drying	Improved organoleptic characteristics with higher scores at 5%, dehydrated carrots slices had a higher rehydration ratio of 3.3.	Ghosh et al., 2006
	Pineapple	Dipping in sugar concentration (40, 50, and 60° Brix), immersion time (0, 3, and 6 hours).	Microwave drying	Preserved the color, reduced shrinkage, improved rehydration capacity, and softened the texture of sample.	Corrêa et al., 2011
	Apple	Dipping in 52% (w/w) sucrose / corn syrup solutions; fruit / solution ratio of 1:10, at 34 °C for 165 min.	Fixed bed drying	Drying rates decreased, caused a great loss of vitamin C.	Azoubel et al., 2009
	Mango	Immersed into 22.1% and 39.5% (w/w) cerelose aqueous solutions, syrup-fruit weight ratio of 32:1, with agitation at 25 °C.	Hot air drying	Osmotic dehydration adversely influenced drying rate, the increase in glucose concentration caused decreased the $D_{eff}$ .	Nieto et al., 2001
	Mandarin	Immersed in osmotic solutions containing 60% sucrose and 60% glycerol (9:1, 8:2, 7:3, 6:4 and 5:5 w/w, respectively) at 55 °C.	Hot air drying	An increase in the glycerol ratio in the mixtures caused a significant decrease in hardness, and increased the darkness of the product.	Pattanapa et al., 2010
	Tomato	Dipped in either salt (0%, 10%, 15%, 20%) for 0, 2.5, 5.0, and 7.5 min.	Sun drying	Tomatoes dipped in salt solutions had lower rehydration ratios, did not improve the color of product.	Latapi & Barrett, 2006
Alkali liquor	Plums	Dipped into alkali emulsion contained $K_2CO_3$ (5%, v/v) and ethyl oleate (2%, v/v), at room temperature for 1 min.	Hot-air drying	Increased the drying rates, and drying time of pretreated samples was 29.4% shorter than that of untreated samples.	Doymaz, 2004
		Dipped in 4% ethyl oleate, 1% KOH, 1% NaOH, or water, at 23 or 60 °C, for 1 min.	Solar and open sun drying	Treated by 1% KOH or 1% NaOH at 60 °C were the fastest ones reaching to the final weight loss percentage, with slight variations in prune colors.	Tarhan, 2007
	Berry	Dipped in 0.1% NaOH solution with fruit to solution ratio of 1:1 (w/v) at 93 °C for 5 s.	Infrared radiation drying	NaOH pretreatment increased drying rate and moisture diffusivity and reduced the number of broken berries.	Shi et al., 2008
	Grape	Dipped in NaOH solution of 10, 20, 45, 70, or 80 g/L, for 10, 61, 185, 309, or 360 s.	Hot air drying	The use of relatively low sodium hydroxide contents increased the dehydration rate.	Corona et al., 2016
		Dipped in 2% ethyl oleate plus 2.5% $K_2CO_3$ , 2.5% KOH or 2.5% $Na_2CO_3$ , for 1 min.	Hot air drying	Reduced the drying time by 49%–57%.	Doymaz, 2006
	Gold cherry	Dipped in 2% ethyl oleate + 4% $K_2CO_3$ , at 25 °C for 1 min.	Hot air drying	Drying times for 15% final moisture were reduced by 3%–15%.	Ozdemir et al., 2016
	Sour cherry	Pretreated with 2% ethyl oleate + 5% $K_2CO_3$ , for 1 min.	Hot air drying	Drying time was reduced by 26%–30%.	Doymaz, 2007
	Ginger	Dipped in 2% ethyl oleate + 5% $K_2CO_3$ , for 1 min.	Hot air drying	The drying time decreased, rehydration capacity increased.	Deshmukh, 2013
	Tomato	Dipped in 2% ethyl oleate + 3% $K_2CO_3$ , for 1 min.	Hot air drying	Reduced drying time, increased rehydration ratio.	Doymaz & Özdemir, 2014

Sulfite solution	Mushroom	Dipping in sodium metabisulfite solution (1 or 5 g/L) for 10 min.	Hot air drying	Facilitated drying process, enhanced rehydration capacity and improved attractiveness of dried product.	Martínez-Soto et al., 2007
	Apples, bananas, carrots	Immersing in 2% sodium bisulfite solution for 5 minutes.	Convective drying	Prevented enzymatic browning reactions, color parameters (L, a, b) experienced only a small increase.	Krokida, et al., 2000
	Apricot	Treated with potassium metabisulfite (KMS) at concentrations of 2%–8% for 30, 45 and 60 min.	Solar tunnel-drying and open air drying	KMS pretreatment at concentration of 6% for 60 min helped in maintaining the quality (higher total carotenoids and ascorbic acid, lower non-enzymatic browning) of dried apricots for up to 12 months of ambient storage.	Mir et al., 2009
	Tomato	Dipped in sodium metabisulfite (0%, 4%, 6%, 8%) for 0, 2.5, 5.0, and 7.5 min.	Sun drying	Prevented color degradation during drying, especially by 6% or 8% sodium metabisulfite for 5 min; increased rehydration ratio; decreased yeast growth.	Latapí & Barrett, 2006
	Sweet potato	Dipped in 1% (w/v) NaHSO <sub>3</sub> at room temperature for 1 min.	Hot air drying, freeze drying	Maintained higher lightness, maintain ascorbic acid and β-carotene content.	Ahmed et al., 2010b
	Peach	Blanching (50 °C for 2 min) with 1% KMS	Hot air drying	Shortened drying time, increased the $D_{eff}$ of peach slices	Kingsly et al., 2007
	Strawberry	Soaked in 2% sodium metabisulfite at room temperature for 2 min.	Sun drying	Improved rehydration ratio, acceptability of dried products	El-Beltagy et al., 2007
Acid solution	Carrot	Blanching in boiling 0.7% (w/v) citric acid (to obtain the pH of carrot of either 4 or 5.	Hot air drying	Enhanced drying rate, rehydration capabilities, and produced dried carrots with preferable redder color.	Hiranvarachai et al., 2011
	Tomato	Pretreated with solution of citric acid (1:25, w/w) at 20±1 °C for 1 min.	Hot air drying	Increased water diffusivity, reduced drying time, and improved rehydration ratio.	Doymaz, 2014
	Quince	Pretreated with citric acid (1:25, w/w) at 20±1 °C for 1 min.	Hot air drying	Reduced drying time more than 16%	Doymaz et al., 2015
	Sweet potatoes	Immersed in KMS and citric acid solutions in the following concentrations for 30 min: (a) 0.5:0.5% (b) 0.5:1.0% (c) 1.0:0.5% (d) 1.0:1.0%	Hot air drying	The slices treated with 1.0% KMS and 1.0% citric acid at 50 °C provided better color and would need less energy for drying.	Singh et al., 2006
	Apple	Dipped in solutions with various combinations of ascorbic acid (AA), citric acid (CA) and calcium chloride (CC) at different concentrations (0.1–1.5%) for up to 10 min.	Infrared dry-blanching	The combination of any two chemicals among CA (0.2–0.4%), AA (0.5%–1.5%) and CC (0.1–1%) was effective to slow down enzymatic browning rate, preserving the surface color of apple cubes.	Zhu et al., 2007
	Peach	Dipped in 0.5% citric acid at room temperature for 2 min.	Hot air drying	Shortened drying time, increased the $D_{eff}$ of apple slices.	Doymaz, 2010
	Banana	Blanching (50 °C for 2 min) with 1% ascorbic acid.	Hot air drying	Shortened drying time, increased the $D_{eff}$ of peach slices.	Kingsly et al., 2007
	Kidney bean seeds	Dipped in a solution containing 10 g/L ascorbic acid and 10 g/L citric acid for 1 min. Dipped in citric acid (1:200, w/w) at 20±1 °C for 1 min.	Freeze drying Hot air drying	Improved product color, reduced freeze-drying time and shrinkage. Shortened drying time up to 26.66% when dried at 50 °C.	Pan et al., 2008 Doymaz, 2015

limitations to application of the osmotic dehydration as noted above, especially changes related to leaching from the product (color, acids, sugar, minerals, vitamins, etc.) should not be neglected. Additionally, during osmotic dehydration, the most important change is dilution of the concentrated solution, and solution recycle caused additional processing step, especially mixed solutes as it is more complex to adjust (Raoult-Wack, 1994). It also observed that as osmotic pretreatment proceeds, turbidity, browning, content of insoluble solids as well as microbial load in the osmotic solution increase gradually, therefore, the recycle and management of a large amount of osmotic solution is a tough issue, which must be paid more attention (Ciużyńska et al., 2016).

### 2.1.2 Alkaline liquor

The alkaline dipping pretreatment is primarily used for whole berry fruits, whose outer skin is covered by hydrophobic wax. The wax coating consists largely of oleanolic acid, lead to a low rate of moisture evaporation during drying, it presents as an obstacle to drying (Serratosa et al., 2008). Dipping of berries into alkaline emulsions of ethyl or methyl esters, sodium hydroxide, and potassium carbonate for several minutes can dissolve the wax layer, or destroy the microstructure in the epicuticular wax layer (Bingol et al., 2012; Doymaz & Pala, 2002), or even breakdown of intracellular bonding through de-esterification of pectin (Esmaili et al., 2007). And then enhance the permeability of the skin to moisture, facilitate moisture diffusion and increase the dehydration rate (Corona et al., 2016; Doymaz & Altiner, 2012).

Alkali liquor dipping pretreatment accelerates the drying rate and reduces the drying time, consequently decrease the deterioration of quality of products, as listed in Table 1. Bingol et al. (2012) showed that alkali dipping pretreatment (potassium carbonate and ethyl oleate solutions at 60 °C for 2 and 3 min), improved the lightness ( $L^*$  values) of dried grapes by 37%–55%. The finding was similar to the reports by Doymaz & Pala (2002) and Doymaz & Altiner (2012) for grapes. In terms of color-preserving of dipping treatment, the alkaline emulsions might either suppress the activity of PPO or increase drying rates, consequently enhances the sugar concentrations close to the skin and therefore lowers the water activity, which in turns slow down the browning reaction (Grncarevic & Hawker, 2010).

The drying process accelerated by alkali dipping of berries was influenced by the composition of chemical agents, concentration, pH, temperature, and the dipping time (Esmaili et al., 2007). The drying time to obtain a same moisture content of grapes pretreated with potassium carbonate plus ethyl oleate was shorter than that in potassium carbonate plus olive oil, indicated organic component of the dipping agent was more influential than potassium carbonate for grape pretreatment. It was consistent with results by Doymaz & Pala (2002) and Doymaz (2006). However, Tarhan (2007) observed that, ethyl oleate solution had slighter accelerated drying process of plums, while both KOH solution and NaOH solution significantly enhanced weight loss rate, it may own to the variety difference between grape and plum. Bingol et al. (2012) reported that, the drying rate of grape increased with the temperature of the dipping solution increased, and samples dipped for longer times

obtained lower drying time, such as the dipping time at 30 and 40°C for 3 min reduced the drying time by 11 and 5 h, respectively, compared to 2 min dipping. Similar results were reported by Tarhan (2007) for plums treated at 60°C showed higher weight loss rate than that at 23°C. However, when dipping temperature at 50 and 60°C, there were no significant difference of drying time between grapes dipping for 2 and 3 min (Bingol et al., 2012).

While alkaline liquor dipping pretreatment also has limitations. Alkali dipping pretreatment may lead a leaching, degradation and oxidation of ascorbic acid, owns to alkaline media and effects of oxygen caused by micro-crack of epidermis. Vásquez-Parra et al. (2014) found that, NaOH, olive oil and  $K_2CO_3$  pretreatments significantly decreased the content of vitamin C of dried cape gooseberries (ranging from 0.26 to 0.46 mg/g db.) relative to the untreated (more than 0.55 mg/g db.). In addition, the residue of alkaline liquor in the dried products may trigger food safety issues, and do harm to human's health. So alkaline liquor dipping technology should be applied only if a major drying time reduction is needed (Carranza-Concha et al., 2012).

### 2.1.3 Sulfite solution

Sulfitation or sulfuring has been widely used in the food industry to reduce darkening during drying and prevent quality loss during process and storage of foods (Miranda et al., 2009). It is usually performed using sulfur dioxide gas or water-soluble sulfite salts such as potassium metabisulfite ( $K_2S_2O_5$ ), sodium metabisulfite ( $Na_2S_2O_5$ ) and sodium hydrogen sulfite ( $NaHSO_3$ ). When  $SO_2$  is absorbed into the fruit, it is converted mainly to the bisulphate ion. Both enzymatic and non-enzymatic browning and microbial activity are prevented by using sulfites at low concentration (Joslyn & Braverman, 1954). Sulfite inactivates PPO through the reaction between sulfite ions and quinines, by thus to inhibit of PPO activity and deplete of oxygen (Van Hal, 2000). It also acts as an antioxidant in preventing loss of ascorbic acid and protecting lipids, essential oils, and carotenoids against oxidative deterioration during processing, and it has the advantages of maintaining color, preventing spoilage, and preserving certain nutritive attributes (Mujumdar, 2006).

Sulfitation treatment has been widely used to improve quality (color, rehydration ratio,  $\beta$ -carotene content, and etc.) of agro-products, such as apricot, tomato, apple, banana, potato and carrot (Krokida et al., 2000; Latapi & Barrett, 2006; Mir et al., 2009; El-Beltagy et al., 2007), as illustrated in Table 1. Meanwhile, sulfitation facilitates drying through changing the cell membranes permeability of fruits and vegetables (Lewicki, 1998). Peaches pretreated with 1% potassium meta bisulphate, the drying rate and  $D_{eff}$  were increased by 12.5%–14.3% and 13.2%–15.5% compared to the untreated one (Kingsly et al., 2007). Karabulut et al. (2007) found that, sulfuring pretreatment reduced the drying time of apricots by 3.6%–38.64%, and the  $L^*$  values of dried product increased, as compared to non-sulphurated one. Mir et al. (2009) observed that, apricots pretreated with  $K_2S_2O_5$  solution had higher retention ratio of ascorbic acid and carotenoids.

There are various processing factors affects the uptake of sulfites, such as performed forms (gas or solution), the

concentration of solution, processing time, and the pH of the soak liquor. For example, the extent of non-enzymatic browning of apricots was decreased with the increase of dipping time and concentration of potassium meta-bisulphite solution (Mir et al., 2009). Notably, pretreatment of vegetables and fruits with sulfur dioxide gas is impractical, by contrast, sulfite solutions are preferred as the most practical method of controlling absorption (Jayaraman & Gupta, 2006).

Although sulfite pretreatment has marked effects on maintaining color of products, but it also causes a loss of some water-soluble nutritional compounds, creates undesirable flavor and soft texture. For example, metabisulfite pretreatment caused the total loss of ascorbic acid apricots by leaching from the fruit into the sulfite solution during the immersion treatment (Garcia-Martinez et al., 2013). Moreover, sulfite is being discarded and often forbidden by legislation. The most prominent problem of sulfite pretreatment is the chemical residue in the product, which can cause some health problems such as asthmatic reactions in some sensitive individuals (Güçlü et al., 2006; Kamiloglu et al., 2016; Taylor et al., 1986). New standards for food additives by the Ministry of Health of the People's Republic of China has increased the standard for use of sulphur treatments in food processing; the residue of sulfur dioxide, potassium metabisulphite, sodium metabisulphite, sodium sulphite in food products has been strictly limited to 0.2g/kg of dried vegetables, and 0.1 g/kg of dried fruits (Ministry of Health of the People's Republic of China, 2011). In addition, the Food and Drug Administration requires a label declaration on any food containing more than 10 ppm of sulfating agents since 1986, because of their alleged hazard to asthmatics (FDA 1986). As organic foods become increased popular, use of sulphite in food processing is being discouraged.

#### 2.1.4 Acid liquor

Acid pretreatment also frequently used to improve the product quality through inactivating of enzymes, enhancing pigment stability and modifying texture of agro-products. The optimum pH of polyphenol oxidase lies within the range of 6.0–7.0, so the polyphenol oxidase activity can be inhibited when the media pH is lowered to 3.0, consequently, the rate of enzymatic browning decrease (Langdon, 1987). Moreover, the stability of pigments, such as betalains and anthocyanins, can be enhanced at acid condition (Ngamwonglumlert et al., 2016), and texture of product can be maintain by using acid solution, due to their chelating properties (Hiranvarachat et al., 2011).

Citric acid, as an organic acid, is the most commonly used as anti-darkening agent and a texture-modifier of fruits and vegetables. Meanwhile, it has been confirmed that citric acid can accelerate the drying process, as pectin loosening in acidic environment, in turns promoting water removal (Hiranvarachat et al., 2011). The effects of citric acid pretreatment on maintaining color and enhancing drying rate of fruits and vegetables, as summarized in Table 1, which was also influenced by the concentration of solution, dipping time and temperature. Zhu et al. (2007) reported that dipping time affect the *L* values of apple cubes, for instant, 5-min dipping showed a higher *L* value than 0.5- and 1-min dipping, attributed to long dipping treatments resulted in better penetration; meanwhile, the decrease

in *L* value was reduced when acid solution concentration increased.

Additionally, ascorbic acid as an antioxidant has been used to pretreat agro-products before drying, as it can reduce the o-quinones to colorless dihydroxyphenols, and form a barrier to oxygen diffusion into the product (Santerre et al. 1988). Generally, the ascorbic acid is considered less effective in inhabiting enzymatic browning, attributes to its insufficient penetration into the cellular matrix, so it usually combined with citric acid. Zhu et al. (2007) found that combined ascorbic acid and citric acid was effective to slow down enzymatic browning rate of apple cubes. Doymaz (2010), Kingsly et al. (2007) and Pan et al. (2008) also confirmed that citric acid or ascorbic acid shortened drying time or improved product color of sweet potato slices, peach and banana, respectively.

In addition, acid dipping also involves in the loss of water soluble nutrients by leaching into dipping solution and degradation at acidic environment. For example, solid loss of apple cubes was up to 19.28% when dipped in ascorbic acid + citric acid for 10 min (Zhu et al., 2007). Besides, some pigments are sensitive to acids, such as chlorophylls and carotenoids, using acid solution may cause the pigments degradation and color change. For example, the chlorophylls are prone to be pheophytin at acidic condition, lead to the color changes from green to olive brown (Ngamwonglumlert et al., 2016). Acid soaking significantly reduced the  $\beta$ -carotene retention of carrots by 29%–61%, as compared to water soaked samples (Hiranvarachat et al., 2011).

## 2.2 Gas phase

### 2.2.1 Ozone

Ozone (O<sub>3</sub>), highlights for its high oxidation potential (2.07 mV), generally used as a bactericide or fungicide, without residue after the decontamination process by decomposing into oxygen (Freitas-Silva & Souza, 2016). Ozone usually applied to inactivate various bacteria, including Gram-negative and Gram-positive vegetative and sporulated forms, as well as components of the cell envelope, spores, fungal, or viral capsids at relatively low concentrations and short contact times (Freitas-Silva and Venancio, 2010).

Recently, ozone has been applied to reduce pesticide residue of vegetables and fruits. Hwang et al. (2002) reported that ozone wash reduced the residues of mancozeb and ethylene-thiourea in fresh apples and their products. Antos et al. (2013) treated blackcurrants with ozone before drying, the results showed that, the utilization of ozone in a gaseous phase permitted a 38% reduction of mancozeb residues, in comparison with the initial concentration. For this reason, it is important to develop efficient methods of food processing which would enable a reduction in the active ingredient residues. Nevertheless, ozone may cause undesirable effect, it may promote oxidative degradation of chemical constituents, causing loss of color, change in aromaticity, and mischaracterization of the initial quality of the food (Miller et al., 2013).

### 2.2.2 Carbon dioxide

Carbon dioxide (CO<sub>2</sub>) pretreatment shows dominant advantages, because of its environment-friendliness and safety for

food as well as quality. Its general application form is called carbonic maceration (CM) technique, invented by Michel Flanzy in 1934, it involves placing the samples into a closed tank with a carbon dioxide-rich atmosphere, this adaptation is reflected almost instantly inside plant materials by the transition from a respiratory to fermentative anaerobic metabolism (Tesniere & Flanzy, 2011). The CM results the fruits and vegetables occur under the rich CO<sub>2</sub> anaerobic conditions, the cytoplasm pH decrease, explosive cell rupture, modification of a cell's membrane, inactivation of key enzymes and extraction of intracellular substances, thus enhancing the drying rate (Gunes et al., 2005; Zhao et al. 2016). What's more, acidic environments with low pH value created by CM, and short drying time contributed to higher retention of nutritional components (Zhao et al. 2016).

CM technique has been used for the pretreatment of sweet potato, tomato and chili before drying, effectively enhanced drying process and improved quality of dried products. Zhao et al. (2016) confirmed that CM pretreatment reduced drying time of sweet potato by 38.1%–34.6%, the retention of phytochemicals (flavonoids, anthocyanin, total phenols,  $\beta$ -carotene contents and vitamin C) and DPPH radical scavenging activity of CM pretreatment samples were 13.83%–78.18% and 10.04%–14.09% higher than those of untreated, respectively. Liu et al. (2014) found that CM pretreatment (0.2 MPa, 30 °C, 30 h) accelerated the drying rate of chili by 50%–85%, increased the DPPH scavenging free radical capability, ferric reducing antioxidant power, total phenol contents and vitamin C retention contents of the dried products by 70.1%–90.9%, 40.2%–47.8%, 40.1%–60.0% and 112.7%–582.4%, as compared to those direct-drying samples, respectively. Liu et al. (2011) applied CM pretreatment (0.14 MPa, 36 °C, 72 h) on grapes, the total phenol content and drying rate of fermented grapes increased by 48.3% and 44.6%, respectively, when compared with untreated grapes.

Nevertheless, CM pretreatment induces an amount of anaerobic respiration (Chen et al., 2017), consequently changes the texture and aroma of products. Turgut et al. (2017) verified that CM reduced the drying time of tomato quarters, while, the water activity and titratable acidity of CM pretreated samples were significantly increased, and texture were lower than control one. Chen et al. (2017) reported that CM caused an accumulation of acetaldehyde and ethanol, simultaneously changed the aroma composition of dried jujube products.

Therefore, the CM pretreatment technique has great potential for accelerating the drying process and enhancing the quality of dried products, as well as free of harmful chemical reagents residues. However, it usually involves in treating for 12 – 72 h, the low efficiency may hinder the application of CM. Meanwhile, the deterioration of texture and flavor of product may be unavoidable during CM pretreatment.

### 2.3 Other chemical pretreatment

Besides, there are also other pretreatments applied to foods before drying, e.g. CaCl<sub>2</sub>, ethanol, edible coatings. Immersion in CaCl<sub>2</sub> can increase the concentration of Ca<sup>2+</sup> in the cell wall and prevent the loss of firmness of plant tissues (Alonso et al., 1997). Vega-Gálvez et al. (2008) reported that red bell pepper

pretreated by chemical solution containing CaCl<sub>2</sub>, the cell wall did not rupture significantly after air-drying at 70 °C, a thickening of the cell wall was observed, which enhanced firmness more than twice of the dried sample. Zhao et al. (2016) reported that 15% ethanol dipping pretreatment not only reduced drying time by 51.61%, but also improved rehydration ratio and color attributes of dried products by 26.74% and 18.99%, compared to untreated samples, respectively. In addition, the application of edible coatings pretreatments may reduce the loss of aroma, color and nutrients by reducing oxygen diffusion into the food, minimizing solute incorporation and maintaining the integrity of product during drying (Oliveira et al., 2015). Lago-Vanzela et al. (2013) found that, starch coatings pretreatment, resulted in dehydrated pumpkin with better color and significantly higher retention of trans- $\alpha$ -carotene and trans- $\beta$ -carotene than those without pretreatment. Liu et al. (2014) treated purple-fleshed sweet potatoes with a coating of sodium alginate for microwave-assisted spouted bed drying, and found the coating changes the dielectric properties of sweet potato cubes and shortens the drying time by 8–10 min.

In conclusion, although chemical pretreatments have advantages of enhancing drying process, maintaining quality of products, however, residual alkali liquor, sulfite/sulfur dioxide in foods causes food safety problems. As organic foods becoming more and more popular, using of chemical additives in foods is being discouraged (Dev et al., 2008). Moreover, disposal of larger quantities of waste solution with corrosive chemicals is a serious problem in practice as well. Furthermore, the water-soluble nutrients such as ascorbic acid, minerals, sugars, etc., flow out from the fruits into the solution during liquid phase immersion pretreatment is also an unignorable issue. Therefore, in order to improve the quality and safety of products, the traditional chemical additive pretreatment technique needs to be replaced by a more efficient, safe and controllable method.

## 3. Physical pretreatment

### 3.1 Thermal blanching

Thermal blanching is widely used prior to drying, its primary goal is to inactivate the enzymes involved in the spoilage of fresh agro-products, in addition to reduce the microbial load of products so as to improve its conservation, to soften tissues for facilitating drying process, and to eliminate intracellular air to prevent oxidation.

#### 3.1.1 Conventional hot water blanching

Hot water blanching is a common pretreatment used prior to drying, it involves to immerse fresh products into hot water at a constant temperature ranging from 70 to 100 °C for several minutes (Guida et al., 2013). Generally, hot water blanching has been used to prevent quality deterioration by inactivating the enzymes, destroying microorganisms, or expelling intercellular air from the tissues (Mukherjee & Chattopadhyay, 2007; Neves et al., 2012; Xiao et al., 2012 & 2016). Meanwhile, it also helps to accelerate drying rate by changing the physical properties of the samples such as the permeability of the cell

membranes (Jangam, 2011), dissociating the wax on and forming of fine cracks on the skin of products (Jayaraman & Gupta, 2006).

Currently, conventional hot water blanching is the most popular and commercially adopted method, because of its simple equipment and easy operation. It has been widely applied on pretreatment of agro-products to enhance the drying rate and improve the product quality (Doymaz, 2015; Filho et al., 2016; Cheng et al., 2015; Ando et al., 2016; Doymaz, 2014), such as summarized in Table 2.

During hot water blanching process, the marked deterioration in food quality is also implicated in oxidase inactivation, especially with the development of cooked off-flavors, color alteration and the loss of thermo-sensitive compounds (Benloch-Tinoco et al., 2013). On the one hand, processing for agro-products with complete inactivation of oxidase is more than adequate to those with activity of peroxidase left, as the quality of the blanched products may be better than unblanched (Agüero et al., 2008). As confirmed by Lavelli et al. (2007), the content of  $\alpha$ -Carotene,  $\beta$ -Carotene and Lutein in blanched carrots were 51%, 76% and 87% higher than non-blanched samples, due to the inactivation of peroxidase and lipoxidase activity. On the other hand, the considerable loss of soluble nutrient substance by dissolving or leaching into blanching water can't be neglected, such as sugars, proteins, carbohydrates, water-soluble minerals and vitamin (Garba et al., 2015; Mukherjee & Chattopadhyay, 2007). Furthermore, hot water blanching had negative influence on the texture and microstructure of sample, which aggravated the loss of soluble nutrient substance, even increased the drying time (Olivera et al., 2008; Dandamrongrak et al., 2003; Badwaik et al., 2015).

In addition, hot water blanching generates large quantity of waste water and increases the pollutant charge. So it is very tempting for food industry to use alternative means of thermal blanching such as steam blanching, high humidity hot air impingement blanching, ohmic blanching, and microwave blanching.

### 3.1.2 Steam blanching

To minimize nutrients especially the water-soluble nutrients and solid content dissolves into hot water and reduce the wastewater, steam blanching systems were developed to replace hot water blanching. It is believed that the steam blanching contributes to retention of most minerals and water-soluble components as compared with water blanching, due to its negligible leaching effect.

Compared to hot water blanching, steam blanching for equal treated time resulted in significantly higher ascorbic acid retention (Lin & Brewer, 2005). Lin & Brewer (2005) reported that, steam blanched peas had higher ascorbic acid content (22 mg/100 g) than water blanched peas (14 mg/100 g), slightly lower than non-blanched peas (29 mg/100 g). It was also confirmed by Gamboa-Santos et al. (2012), that steam blanching gave rise to carrots with higher retention of vitamin C (81.2%) than those blanched in water at 60 °C (1.3%). What's more, steam blanching can significantly inactivate the biological enzyme due to the high enthalpy contents. Steam blanching of 3 min gave low activities of 1.71% of PPO (Ndiaye et al., 2009), while, immediately pasteurized at 85 °C for 3 min, the PPO

residual activity of mango pulp was about 50% (Vásquez-Caiçedo et al., 2007). Besides of oxidase inactivation, steam blanching increased the content of phytochemicals content in samples by enhanced extraction of these components as a result of increased permeability of cellular membrane, such as phenols and ACNs in blueberries (Del et al., 2012).

However, during the steam blanching process, softening of the tissue and undesirable quality changes often result from long heating time due to the lower heat transfer in steam blanching especially when the velocity of the steam is very low. And during the early stage of steam blanching, steam condenses on the surface of the products, because of the product temperature lower than the steam, which may result in non-uniform blanching effects.

### 3.1.3 Superheated steam impingement blanching

With increasing in demand of high-quality products, it is very important to minimize nutrient loss during the pretreatment, the traditional hot water and steam blanching should be replaced by novel techniques. Superheated steam impingement blanching (SSIB), also called high humidity hot air impingement blanching (HHAIB), is a recently developed thermal treatment technology, which combines the advantages of superheated steam blanching and impingement technologies. SSIB has higher enthalpy, transfer heat rate and energy efficiency, the heat transfer coefficient of SSIB was about 1403 W/(m<sup>2</sup>·K) with velocity of 14.4 m/s, temperature of 135 °C, and relative humidity of 35%, respectively, it is about 12 times of that of hot air impingement at the same temperature and velocity (Du et al., 2006). SSIB has advantages in a uniform, rapid and energy-efficient blanching, as well as better product quality retain (Specht, 2014; Xiao et al., 2014).

SSIB possesses an excellent capability of preventing browning and maintaining color by inactivating oxidase rapidly, increasing drying rate by modifying the skin and pulp tissue (Xiao et al., 2009 & 2012; Gao & Xiao, 2008). Recently, SSIB technology has been applied to several vegetables and fruits pretreatment, as illustrated in Table 2. Wang et al. (2017a) applied HHAIB processing (110 °C, RH 30%–40%, air velocity 14.0 ± 0.5 m/s) to red pepper, results showed that POD activity rapidly decreased to 7% after 120 s; the drying time for blanched samples were reduced by 17 h, as compared to non-blanched peppers. Bai et al. (2013a) observed that the SSIB completely inactivated PPO within 7 min at 90–120 °C of apple quarters with thickness of 38 cm, while infrared radiation at 4000 W/ m<sup>2</sup>, fully inactivated PPO of 1.3 cm apple slices also needed 7min; the retention of vitamin C more than 11% when blanched at 90 °C for 7 min. Bai et al. (2013b) also reported that SSIB effectively inactivated PPO activity at 110 °C for 90s, reduced drying time by 12–25 h and improved color quality of seedless grapes, which presented as desirable green–yellow or green color.

SSIB technology is excellent of reducing time of oxidase inactivation and minimizing nutrient loss. And therefore, it will play an increasingly important role in agro-products processing. However, SSIB technology is still in its infancy, and further studies are needed to design and testing of large SSIB equipment for large-scale industrial operation, improve heating

Table 2. Effects of thermal blanching pretreatments on drying characteristics and quality attributes of fruits and vegetables.

Methods	Product	Pretreatment process	Drying method	Main conclusion	Reference
Hot water blanching	Kidney bean seeds	Immersed in hot water at 80±1 °C for 1 min.	Hot air drying	Pretreated sample with higher rehydration of 10%–20%.	Doymaz, 2015
	Pumpkin	Immersed in boiling water (98.3 °C) for 1 min.	Hot air drying	Increased evaporated water constant fluxes of 12.40%–23.76%, but reduced total sugar contents of 8.24%–14.86%.	Filho et al., 2016
	Cherry tomato	Blanched with hot water (90±1 °C) for 5 min.	Hot air drying	The $D_{eff}$ varied in the range of $1.7281 \times 10^{-9}$ to $4.6306 \times 10^{-9} \text{ m}^2 \text{ s}^{-1}$ for the fresh sample, while $2.1034 \times 10^{-9}$ to $6.6487 \times 10^{-9} \text{ m}^2 \text{ s}^{-1}$ for the blanched sample.	Cheng et al., 2015
	Carrot	Immersed in hot water (60, 70, 80 or 100 °C) for 5 min.	Hot air drying	Drying rate was increased by more than 10%, capacitance of cell membrane and pectin methyltransferase activities were decreased by more than and 16% and 60%, respectively.	Ando et al., 2016
	Banana	Blanched in boiling water for 3 min.	Heat pump drying	Increased drying rate by 8% and improved moisture diffusivity by 106%.	Dandamrongrak et al., 2002
	Quince	Immersed in hot water at 80 ± 1 °C for 1 min.	Hot air drying	Decreased drying time more than 14%, and increased rehydration ratio.	Doymaz et al., 2015
	Pepper	Immersed in hot water at 75 °C for 180 s.	Hot air drying	Blanched pepper had higher initial drying rate ( $1.44 \text{ kg} \cdot \text{kg}^{-1} \cdot \text{h}^{-1}$ ) than in fresh pepper ( $0.84 \text{ kg} \cdot \text{kg}^{-1} \cdot \text{h}^{-1}$ ); the drying time was reduced by 19%.	Weil et al., 2017
	Asparagus	Placed in distilled water baths set at 70, 80 and 90 °C	No given	The retention of ascorbic acid lowered than 2%	Zheng & Lu, 2011
	Banana	Blanched in boiling water for 3 min.	Heat pump drying	Blanching failed to improve drying rate, even increased drying time.	Dandamrongrak et al., 2002
Steam blanching	Apple, banana, potato and carrot	Carried out by blowing steam for 2 min.	Conventional drying	Prevented enzymatic browning, improved color of products.	Krokida et al., 2000
	Galega kale	Blanched by water steam at 101, 325 Pa for 1 min.	Conventional drying	Improved color and appearance, reduced the degradation of vitamin C, antioxidant capacity and chlorophylls.	Araújo et al., 2016
	Cauliflower	A single layer of the cauliflower florets suspended above 400 g of boiling water for 10 min.	Without drying	Induced the least reductive effect on glucosinolates, total monomeric anthocyanins, total phenols, and antioxidant capacity, compared to hot water blanching and boiling treatment.	Volden et al., 2009
	Parsley leaves	Subjected to the steam blanching over the boiling water 99 ± 1 °C for 3 s (every time), and repeated four times.	Microwave-convective drying	Reduced the drying time maximally by 28.9%, decreased the specific energy consumption up to 28%, and increased the color stability.	Sledz et al., 2016
	Broccoli	Blanched for 30, 60, 90, 120 and 180 s respectively.	Hot air-drying	Rapidly inactivated peroxidase activity within 60 s, ascorbic acids losses less than hot water blanching.	Roy et al., 2009
Superheated steam impingement blanching (SSIB)	Yam	Blanched at 120 °C and 35% relative humidity for 3, 6, 9 and 12 min, respectively.	Air impingement drying	When blanching for 6 min, drying time was reduced by 35%, whiteness index was increased by 50%.	Xiao et al., 2012
	Sweet potato	Treated with 120 °C and 35% relative humidity for 3 and 5 min separately.	Air impingement drying	Increased drying time by 11% and 44%, but obtained a homogeneous compact structure, softer texture, and desirable color.	Xiao et al., 2009
	Sea cucumber	Blanched at 90–200 °C for 5–40 min under relative humidity of 10%–50%, air velocity of 3–20m/s.	Air impingement drying	Autolytic enzyme was completely inactivated, the color and shape of the products were improved.	Gao & Xiao, 2008

Apple	Sample was treated with four different temperatures: 90, 100, 110 and 120 °C, relative humidity was 40%–45%, and air velocity was 15.0 m/s. Blanched at different temperatures (90, 100, 110, and 120 °C) and durations (30, 60, 90, and 120 s).	Without drying	The time of PPO totally inactivated (38 cm quarters, 90 °C – 7 min, 100 °C – 6 min, 110 °C – 5 min, 120 °C – 5 min) was shorter than infrared (1.3 cm slices, 7 min). Drying times reduced by 12–25 h at drying temperatures of 55–75 °C, significantly inhibited enzymatic browning and yielded desirable green–yellow or green raisins, when blanching at 110 °C for 90s.	Bai et al., 2013a
Seedless grape		Air impingement drying	SSIB maintained higher retention of red pigments and ascorbic acid, and values of antioxidant activity compared to samples blanched by hot water; reduced drying time up to 4.0 h compared to untreated ones.	Bai et al., 2013b
Red pepper	Blanched at 110 °C for 1, 2 and 3 min, with air velocity of 14.0 ± 0.5 m/s	Air impingement drying	POD residual activity was decreased to 7% after 120 s, drying time for samples blanched for 30, 60, 90, 120, 150, 180 s was reduced by 1, 3, 5, 7, 4, and 3 h, respectively; but over blanching (210 s and 240 s) caused red pigment loss (13% and 26%) and drying time increasing (56% and 86%).	Wang et al., 2017a
Artichoke	Field strength of 14 V/cm, when the core of the sample reached to 80 ± 2 °C, samples were maintained for 0, 60, 120, 180, 240 or 300 s. Ohmic blanching (25 and 40 V/cm at 85 °C) and water blanching (at 85 and 100 °C).	Without drying	Inactivated both PPO and POD at shorter processing times than conventional blanching; the color, protein and polyphenol content of the product were well preserved.	Wang et al., 2017b
Grape	Ohmically heated in solution containing 2% citric acid to 60 °C, used a field strength of 15 V/cm, and conducted at 30 Hz, 60 Hz, and 7.5 kHz, respectively.	Fluid bed drying	Both ohmic and water blanching rapidly inactivated POD, vitamin C loss of sample treated by ohmic (48.02% – 65.80%) was lower than that of water blanching (71.19%).	Icier, 2010
Apple	Blanched samples at 95 °C during 1 min, with electric field intensity of 60 V/m and frequency of 50 Hz.	Dried by food dehydrator	Significantly increased the drying rate, and related to the frequency of alternating current, being highest at low frequencies (30 and 60 Hz) and lowest at a high frequency (7.5 kHz).	Salengke & Sastry, 2005
Strawberry	Blanching temperature was 60 to 85 ± 2 °C and heating time from 0 to 3 min.	Osmotic dehydration	The dehydration time to obtain a weight loss of about 25% was reduced by 75%.	Allali et al., 2009
Purple flesh sweet potato	Performed in a domestic oven, input power: 1,200 W, output 700 W.	Osmotic dehydration	Increased the mass transfer and the effective diffusion rates.	Allali et al., 2010
Green beans	Microwaved for 125 s at 900 W, 150 s at 750 W, and 170 s at 650 W.	Microwave–spouted bed drying	Resulted in rapidly inactivated POD, reduced the drying time, maintained the anthocyanin level of dried products.	Liu et al., 2015
Carrot	Microwave power (360–900 W), blanching time (10–300 s) and blanching water volume (0–150 mL).	Without drying	Processing times were reduced by about half, and the retention of ascorbic acid increased by 50%–64%, as compared to samples blanched by hot water.	Ruiz-Ojeda & Peñas, 2013
Agaricus bisporus	Heated in a 2450-MHz microwave oven with power of 800 W, samples were heated until the center temperature maintained at 100 °C for 1 min.	Microwave–vacuum drying (MVD)	MWB times of the 630 and 900 W were lower than conventional blanching (CB), and more effective than CB in inactivating pectin methylesterase; when conducted at MVB with 300 W for 300 s, obtained higher quality products. Improved the MVD process, obtained more uniform microstructure than hot water blanching.	Sezer & Demirdöven, 2015
				Jiang et al., 2015

(Continued on next page)

Table 2. (Continued)

Methods	Product	Pretreatment process	Drying method	Main conclusion	Reference
	Sweet potato	Input power: 1200 W, output 700 W, at maximum power.	Microwave assisted spouted bed drying (MWSB)	Microwave blanching improved the MWSB drying process, reduced the drying time, and maintained the anthocyanin level in dried products.	Liu et al., 2015
	Strawberry	400 g of fruit were exposed to 400 W for 2.5 min and afterwards cooled in water at 15°C.	Osmotic dehydration	Reduced firmness and color changes, well preserved cells of sample.	Moreno et al., 2000
	<i>Centella asiatica</i> (L.) Urban leaves	Leaves were blanched in a microwave oven at 800 W and frequency of 2450 MHz for 15, 30, 45 and 60 s.	Heat pump-assisted dehumidified drying	Increased moisture diffusivities and rehydration ratio, when blanched for 30 s retained the highest total phenolics.	Trirattanapikul & Phoungchandang, 2014

uniformity, and optimize of the SSIB process, to extend its applications in the food industry (Xiao et al., 2014).

### 3.1.4 Ohmic heat blanching

Ohmic heating (OH) blanching is a thermal process in which heat is internally generated by the passage of alternating electrical current through a body such as a food system that serves as an electrical resistance (Shirsat et al., 2004; Jakób et al., 2010). During ohmic heating, food products are placed between two electrodes, and product temperature rapidly increases. OH has immense potential for achieving rapid and relatively uniform heating, reducing the treatment time that is critical to avoid excessive thermal damage to labile substances (Zareifard et al., 2003), providing microbiologically safety and high quality foods, and causing electroporation of the cell membranes by solubilizing the pectin substances which result in migration of moisture more easily (Kulshrestha & Sastry, 2006). What's more, OH has advantages of energy efficiency and an environment friendly process, compared to conventional water blanching (Varghese et al., 2014).

OH can be used as an alternative fast blanching method for fruits and vegetables (Icier et al., 2006), especially of whole large vegetables and fruits where the process may be accomplished in a relatively short time, usually few seconds, regardless of the shape and the size of the product (Mizrahi, 1996). It has been used to inactivate oxidase and intensify both heat and mass transfer (Kemp & Fryer, 2007; Zhong & Lima, 2003) in certain fruits and vegetables, as well as preserves nutritional and organoleptic quality of products (Salengke & Sastry, 2005; Allali et al., 2009 & 2010; Icier, 2010), as summarized in Table 2. Guida et al. (2013) observed that compared to hot water (100 °C) blanching, ohmic (24 V/cm, 80 °C) blanching inactivated both POD and PPO at 25% shorter processing times; the protein, polyphenolic and chlorogenic acid content of the product were well preserved, which were at range of 9–128%, 53–78% and 200–300% higher than water blanching samples, respectively. Vikram et al. (2005) found that, the reaction rate constants for vitamin C degradation of ohmic heated orange juice was 32%, 46% and 52% lowered than conventional, infrared and microwave heated samples at 50 °C, respectively.

Ohmic blanching efficiency is related to electrical frequency, field strength, voltage, particle size, ionic concentration, and electrodes (Kaur & Singh, 2016). Salengke & Sastry (2005) reported that, ohmic pretreatment at a low electrical frequency is more conducive to subsequent drying, raisins dried for 30 h, moisture contents of the samples were reduced from an initial average value of 81.2% wet basis to 23.9%, 23.8%, 38.3%, and 44.97% wet basis for the 30 Hz, 60 Hz, 7.5 kHz pretreatments, and no pretreatment, respectively. Allali et al. (2010) reported that, ohmic heating enhanced mass transfer during the osmotic dehydration of strawberry halves, water loss and sugar gain rose with an increase of temperature and duration of ohmic blanching. In addition, the blanching efficiency is dependent on the energy generation, which is proportional to the square of the local electric field strength and the electrical conductivity of the product (Goullieux & Pain, 2005). Therefore, metal ions

or acidic solutions are often used to enhance the electric conductivity (Xiao et al., 2017).

However, there are limitations of ohmic blanching should be emphasized. For instance, the quality degradation may be accelerated by the electrolysis of water, which yields hydrogen at the cathode and oxygen at the anode (Sarkis et al., 2013); the added ionic substances, such as acids and salts, can accelerate corrosion of electrodes (Xiao et al., 2017); it is difficult to achieve dynamic and static performance of the temperature controlling, and heating uniformity for complex heterogeneous foods (Sakr & Liu, 2014).

### 3.1.5 Microwave heating

Microwaves (MW) are electromagnetic waves with frequency varies within 300 MHz to 300 GHz, and wavelengths range from 1 mm to 1 m (Mujumdar, 2006; Chandrasekaran et al., 2013). Microwave heating, as radiofrequency heating, is based on the use of electromagnetic waves of certain frequencies to generate heat in a material (Spigno, 2016), the electric energy conversion is evaluated to be approximately 50% and efficiency of MW heating can reach up to 65% (Nguyen et al., 2013). During microwave heating, the materials absorb microwave energy and convert it into heat by dielectric heating caused by molecular dipole rotation and agitation of charged ions within a high-frequency alternating electric field (Spigno, 2016), the heat generated volumetrically throughout a product rather than relying on the slow conduction of heat through its surface (Regier & Schubert, 2001; Rahath et al., 2016).

Compared to conventional heating, microwave blanching (MWB) has faster heating rates as microwave heating takes place within the wet biological materials, and it increases with the effective output power used (Ranjan et al., 2016; Ruiz-Ojeda & Peñas, 2013). MWB requires lower processing time, has higher heating efficiency and nutrient retention compared to conventional methods (Krokida et al., 2000), and reduces the drying time of agro-products, as summarized in Table 2. For instance, pectin methylesterase residual activities of carrot slices treated by water blanching and MWB for 300s were 0.099 and 0.0162  $\mu\text{mol}/\text{min}/\text{g}$ , respectively; total pectin and total dry matter of MWB ones were 25%–50% and 40%–86% higher than water blanching samples, respectively (Sezer & Demirdöven, 2015). Liu et al. (2015) also observed that HWB, SB, and MWB treatments required 130, 110, and 60 s to reach 90% enzyme activity degradation in purple flesh sweet potato, respectively; MWB reduced the drying time and increased lightness ( $L$  value) of samples by 28.6% and 24.42%–36.66%, compared to SB and HWB, respectively; moreover, the anthocyanin retention of dried products treated by MWB (59.34%) were higher than HWB and SB samples (53.55% and 40.37%, respectively). Jiang et al. (2015) found MWB reduced the drying time of *Agaricus bisporus* slices by 22% compared with that blanched by hot water, the micro-structure of the MWB-treated sample was more uniform than that of the HWB sample.

However, there are some drawbacks of MWB that impedes its application. On the one hand, MW heating is very difficult to have a homogeneous treatment, which is some points remain at a lower temperature receiving an inadequate lethality while others overheat (Vadivambal & Jayas, 2010). On the other hand, the temperature is a not easily predictable or controllable

manner, as the typical frequencies of MW heating, the origin of dielectric loss is due to ion conductivity and dipole orientation, these effects are frequency dependent (Regier & Schubert, 2001), and effected by sample type, shape, size, composition, moisture content, and etc. (Datta et al., 2005). Furthermore, the limited penetration depth of microwave also worsens the non-uniform heating of microwave heating (Koskiniemi et al., 2011).

### 3.2 Non-thermal process

Thermal pretreatments have been reported to be responsible for undesirable changes in quality attributes of fruits and vegetables, such as, tissue cell membrane disruption, protein denaturation, phytochemicals thermal degradation, poor firmness and crispness (Lee et al., 2006; Belie et al., 2000). Due to their important superiority in alleviating the quality degradation of agro-products, non-thermal process techniques have attracted increasing attention within the food industry (Rastogi, 2011).

#### 3.2.1 Ultrasonic field

Ultrasound is a kind of mechanical waves with a frequency between 20 kHz and 1 MHz, and which requires an elastic medium to spread (Paniwnyk L., 2016). It is characterized by the formation, growth, and collapse of bubbles when sound waves are in contact with a liquid medium, this phenomenon is called cavitation and there is generation of thousands of bubbles and cavities (Bermúdez-Aguirre & Barbosa-Cánovas, 2016). Ultrasound has been demonstrated to improve mass transfer in food owns to exist direct (inertial flow and “sponge effect”) and indirect effects (micro channel formation) (Miano et al., 2015; Tao & Sun, 2015), caused by mechanical fluctuation and cavitation effect of ultrasound (Beck et al., 2014; Fan et al., 2008; Gamboa-Santos et al., 2014). Furthermore, ultrasonic can be conducted at ambient temperature due to its low heating effect, the heat-sensitive compounds of food can be well protected (Chemat et al., 2011).

The research of ultrasound pretreatment on agro-products has received increasing interest (Rodrigues & Fernandes, 2007b; Schössler et al., 2012). Recently, ultrasound has been commonly used as a pretreatment processing to assist drying of agro-products, as illustrated in Table 3. Ultrasound has been proved to enhance the drying rate by altering micro-structure of plant tissue (Rodrigues & Fernandes, 2007b; Tao et al., 2016; Tao & Sun, 2015), and improve quality of products by shortening drying time and increasing the extraction ability of compounds (Çakmak et al., 2016). For instant, ultrasound treatment lead to breakdown of cells in carrots, and longer ultrasound treatment time resulted in greater structure destruction of carrot, as showed in Fig. 3 (Nowacka & Wedzik, 2016). The ultrasound pretreatment reduced the drying time by 31% in comparison to untreated apple cubes, the dried products treated by ultrasound exhibited 6%–20% lower density, and porosity of 9%–14% higher than untreated samples (Nowacka et al., 2012). Tao & Sun (2015) showed that, the drying kinetic increases with the increase of acoustic intensity within certain limits, the ultrasonic efficiency is closely related to acoustic intensity. What’s more, ultrasound pretreatment conduced to a better color maintaining in dried carrots, and carotenoid

contents in dried material treated with ultrasound at a frequency of 21 kHz for 10 and 20 min were 2% and 24% higher than untreated samples (Nowacka & Wedzik, 2016).

However, the structural damages of plant tissue simultaneously lead to decrease the phytochemicals content in products, as lacking of a barrier in the form of a compact layer of cells on the surface contributed, and then facilitating leakage of bioactive compounds from internal matrix to the external solution (Miano et al., 2015; Mieszczakowska-Frąc et al., 2016; Zhao et al., 2014). In the work performed by Mieszczakowska-Frąc et al. (2016), the ultrasound pretreatment modified the tissue structure of apple, which caused high loss of polyphenol (35%–54%), monomeric catechins (10%–34%), hydroxycinnamic acids (55%), and dihydrochalcones (63%). Siucińska et al. (2016) also observed that ultrasound pretreatment decreased the anthocyanin content of sour cherries by 11.6%, and antioxidant capacity deterioration rate during the first 8 weeks of storage was higher (42.7%), while the antioxidant capacity deterioration rate of non-sonicated sample was 35.9%. Similar phenomenon was observed by Stojanovic & Silva (2007) when they pretreated rabbiteye blueberries.

Ultrasonic pretreatment has advantages in reducing processing time and maintaining product quality to some extent. While, the ultrasonic technology is still in a stage of lab scale, due to the complexity to scale-up the equipment to industry size with the same working conditions and results. And the most urgent issue is the intensity of cavitation decreases as the medium is away from the tip of the sonotrode generating a non-homogeneous process and also because the small diameter of the sonotrode tip that has been designed to supply high amplitudes (Peshkovsky et al. 2013). In addition, ultrasound requires a coupling medium (such as gel, water or oil) to spread, which intensifies the loss of phytochemicals by leaking from plants tissues to the medium, and limits the application of ultrasonic in food industry in turn. Therefore, a novel non-contact ultrasonic technique, which takes air as the coupling medium should be developed (Álvarez-Arenas, 2010), and conquer practical difficulties to meet large-scale needs of industry as the radiating area of transducers is very small (Gallego-Juarez et al., 1999).

#### 3.2.2 Freezing

Freezing pretreatment usually conducted at  $-20^{\circ}\text{C}$  for several hours and then thawed to room temperature. During freezing, large ice crystals are formed and result in a breakdown of the cellular structure and setting of the porous structure (Sripinyowanich & Noomhorm, 2013), that facilitates water migration and enhance mass transfer. So, freezing has been utilized as pre-drying treatment of fruits and vegetables to accelerate the drying process, and maintain the product quality (Eshtiaghi et al, 1994; Ando et al., 2016; Albertos et al., 2016).

In the study by Ando et al. (2016), the frozen-thawed carrot roots had the higher drying rate than blanched and non-treated samples, and the cell membrane capacitance of frozen-thawed samples (1.71) significantly lowered than fresh (3.24) and blanched at  $60-80^{\circ}\text{C}$  (2.74–2.97). It indicated that physical destruction was caused by formation of ice crystals during freezing, as shown in Fig. 4. Kowalska et al. (2008) revealed that, freezing pretreatments before




**Table 3.** Effects of non-thermal physical pretreatments on drying characteristics and quality attributes of fruits and vegetables.

Methods	Product	Treatment process	Drying method	Main conclusion	Reference
Ultrasound	Parsley leaves	Carried out for 20 min in an ultrasound bath at frequency of 21 kHz.	Microwave-convective drying	Intensified drying process (reduction of drying time by 29.8% and energy expenditures by 33.6%) than blanching treated, increased the color stability, and reduced the bioactive components degradation.	Sledz et al., 2016
	Melon	Immersed in distilled water and submitted to ultrasonic waves during 10, 20, and 30 min.	Hot air drying	Increased water effective diffusivity of 39.3%, reduced the drying time of about 25%, caused a loss of reducing sugars up to 52% in sample after 30min of ultrasound.	Rodrigues & Fernandes, 2007b
	Mulberry leaves	3.0 g sample, immersed into 50 mL of distilled water, as the amplitudes used included 30, 50 and 70%, respectively.	Hot air drying	Reduced the total processing time by 17.2%, the quality properties of dried leaves pretreated by ultrasound were comparable to control samples.	Tao et al., 2016
	Banana	Immersed sample in distilled water and submitted to ultrasonic waves for 10, 20 and 30 min, at 30 °C, the ultrasound frequency was 25 kHz.	Fixed bed drying	When pretreated for 20 min, the drying time of samples was reduced to 207 min at 50 °C, while untreated sample took around 345 min.	Azoubel et al., 2010
	Pineapple	Pretreated with the ultrasonic bath for 10, 20 and 30 min, at 30 °C, the ultrasound frequency was 25 kHz and the intensity was 4870 W/m <sup>2</sup> .	Hot air drying	When pretreated for 20 min, the $D_{eff}$ was increased by 14.4%, drying time was reduced by 11%, caused a 12.1% loss of reducing sugars in products.	Fernandes & Rodrigues, 2007
	Mushroom	Pretreated with ultrasonic bath for 10, 20 and 30 min, ultrasound frequency was 25 kHz and the intensity was 4870 W/m <sup>2</sup> .	Hot air drying	The drying time required to achieve a moisture content of 0.05 g water/g dry solids was reduced by 4%–23%.	Fernandes & Rodrigues, 2008
	Mushroom, Brussel sprout and cauliflower	The sonication pretreatments were carried out for 10, 20, and 30 min at 30 °C.	Hot air drying	Increased drying rate, significantly reduced the drying time by 11–33%, preserved the phenolic content and color values better.	Çakmak et al., 2016
	Carrot	Pretreated with 20 kHz probe and 40 kHz bath for 3 and 10 min.	Freeze drying or conventional drying	Enhanced drying rate, reduced the drying time, and improved rehydration properties of samples, compared to blanched and untreated.	Jambrak et al., 2007
	Carrot	Conducted in a ultrasonic bath, provided 21 and 35 kHz frequency for 10, 20 and 30 min.	Convective drying	Decreased the $D_{eff}$ , created micro-channels, provided better color and carotenoids content preservation in dried samples.	Nowacka & Wedzik, 2016
	Apple	Provided at a frequency of 35 kHz for 10, 20 and 30 min in the ultrasound bath at room temperature.	Convective drying	Caused reduction of the drying time by 31%, exhibited 9%–11% higher shrinkage, 6%–20% lower density, and porosity of 9%–14% higher than untreated sample.	Nowacka et al., 2012
Freezing	Carrot	Placed in a water bath fitted with ultrasound transducers (25 kHz, 0.1 W/cm <sup>3</sup> ) at 40 °C for 45 and 90 min.	Without drying	Increased in polyphenol compound losses, lowered procyranidin polymerization, caused an apple tissue structure modification.	Mieszczakowska-Fraç et al., 2016
	Carrot	Frozen at 233 K for more than 10 h.	Fluidized-bed drying	Accelerated drying rate, reduced volume change for carrots.	Tatemoto et al., 2015
	Carrot	Used a blast air freezer, maintained the frozen samples at -20 °C overnight.	vacuum frying	Helped in maintaining phenolic content and antioxidant capacity of the samples, increased crispness values, and reduced oil absorption.	Albertos et al., 2016
	Green beans, carrot and potato	Frozen at -20 °C in a thermostatic chamber for 12 h and thawed by soaking in distilled water at room temperature for 15 min.	Hot air drying	Drying rate was increased by 36%, capacitance of cell membrane and pectin methylesterase activities were reduced by more than 40% and 70%, respectively.	Ando et al., 2016
	Green beans, carrot and potato	Frozen in a freezing chamber at -18 °C for 24 h.	Fluidized bed drying	Freezing resulted in highest drying rates, gave good rehydration.	Eshtiagi et al., 1994

(Continued on next page)

Table 3. (Continued)

Methods	Product	Treatment process	Drying method	Main conclusion	Reference
	Pumpkin Banana	Frozen at $-18^{\circ}\text{C}$ for 16 h. Frozen at $-34^{\circ}\text{C}$ for 1 h, then stored at $-18^{\circ}\text{C}$ overnight and finally thawed at room temperature for 3 h.	Osmotic dehydration Heat pump drying	Increase solids gain and water loss. Decreased the drying time by 46%, increased $D_{eff}$ by 187%.	Kowalska, 2008 Dandamrongrak et al., 2002
Pulsed electric field (PEF)	Carrot Apple	Electric field intensity of 0.60 kV/cm and duration of 50 ms. Constant field strengths were: 0.10, 0.20, 0.45, 0.65, 0.90, and 1.10 kV = cm, and a treatment duration of $t_{PEF} = 0.1$ s.	Hot air drying Osmotic dehydration	The PEF treatment increased the $D_{eff}$ , reduced the air drying time. PEF pretreatment decreased sugar concentration in the osmotic solution and higher solid content in apple samples, improved mass transfer coefficients.	Amami et al., 2008 Amami et al., 2005
	Beetroot	Electric field intensity of 5–10 kV / cm, pulse numbers of 10–50.	Hot air drying	Increased the effective moisture coefficient by 20%, induced a reduction in drying time of up to 12%, when 10 kV/cm and 50 pulses were applied.	Wiktor et al., 2013
	Potato	Pulse duration 10 ms, pulse repetition time 200 ms, number of pulses 5500, inter-train pause 60 s, and number of trains 1000. Pulses ranged from 5 to 120 and the pulse width was set at 100 $\mu\text{s}$	Convective air drying Convective air drying	Resulted in greater degree of tissue shrinkage and increased in rehydration time, with preservation of colorants. The diffusion coefficients of pretreated samples increased by up to 40%.	Shynkaryk et al., 2008 Arealo et al., 2004
	Red pepper	Electric field strength of 1.0 – 2.5 kV/cm, pulse width of 30 $\mu\text{s}$ ; pulse frequency of 100 Hz, for 1, 2, and 4 s.	Convective drying	Caused cell membrane disruption, reduces drying time by 34.7% reduction in, and maintained color quality (2.5 kV/cm, 100 Hz, 4 s).	Won et al., 2014
High hydrostatic pressure (HHP)	<i>Raphanus sativus</i> Aloe vera Aloe vera gel	Pulse intensity of 1446 V/cm, pulse number of 87, duration for 28 $\mu\text{s}$ . HHP (300, 400, and 500 MPa) treated for 5, 10, and 15 min at the ambient temperature ( $25^{\circ}\text{C}$ ). HHP at 350 MPa for a period of 30 s.	Microwave-assisted spouted bed drying Hot air drying Convective drying	Improved drying rate and vitamin C retained content. Enhanced drying rate, reduced drying time, improved rehydration ability, and modified the texture of the products Increased the water diffusion coefficient, modified the microstructure, increased firmness and retained high antioxidant activity.	Liu et al., 2015 Hulle & Rao, 2015 Vega-Gálvez et al., 2011
	Carrot, apple, and green bean	Treated at different pressure–time–temperature combinations (100 – 300 MPa for 5 – 45 min at 20 and 35 $^{\circ}\text{C}$ ).	Hot air drying	HHP treatments at above 100 MPa caused a significant decrease in the drying times of apples, carrots and green beans.	Yucel et al., 2010
	Potato	Immersed in 1% citric acid solution, and treated at 400 MPa for 15 min.	Hot air drying	Enhanced drying rate, maintain better color, higher apparent density and hardness of sample than thermal blanching.	Al-Khuseibi et al., 2005
	Red paprika	Treated at 400 MPa for 10 min at 25 $^{\circ}\text{C}$ .	Fluidized bed drying	Resulted in higher drying rates, as well as higher mass and heat transfer coefficients.	Ade-Omowaye et al., 2001b
	Banana	HHP of 200 MPa for 5 min at 26 $^{\circ}\text{C}$	Dehumidified air drying	Reduced bulk, improved flavor, decreased $a_w$ , and reduced dehydration time and energy.	Verma et al., 2014
	Strawberry	HHP at 200, 300 and 400 MPa, time intervals from 0–10 min.	Osmotic dehydration	Improved strawberries dehydration rates.	Núñez-Mancilla et al., 2011

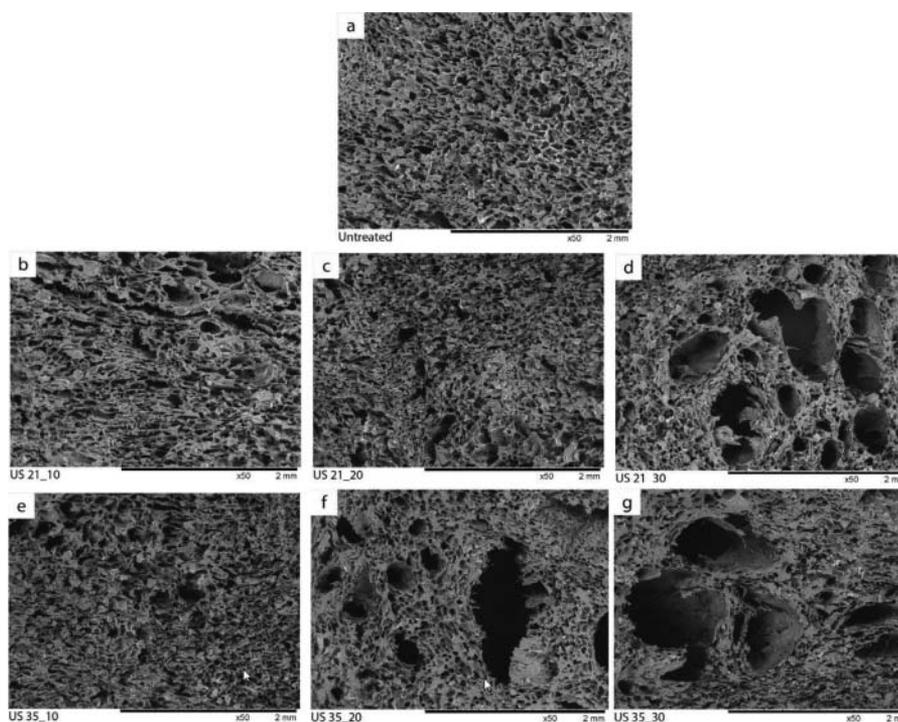

**Figure 3.** Cross section of carrot vascular tissue; untreated (a), ultrasound treated with frequency 21 kHz for 10 (b), 20 (c) and 30 (d) minutes, ultrasound treated with frequency 35 kHz for 10 (e), 20 (f) and 30 (g) minutes. (Nowacka & Wedzik, 2016).


osmotic dehydration of pumpkin gave higher water loss and especially increased solids gain compared to the samples without pretreatment. Pimpaporn et al. (2007) observed that, freezing pretreatment improved the lightness, crispness and also reduced the toughness of dried potato chips. Besides, because of a faster heat transfer between frozen cells, and water can rapidly evaporate from ice crystal state under vacuum condition, so that, freezing has been usually applied prior to vacuum drying to achieve a higher rate of heat transfer (Shyu & Hwang, 2001).

Though freezing treatment reduced the drying time by 46% compared to untreated banana, while the frozen samples exhibited extensive browning, as color value was 58% lower than control, resulted in product quality degradation (Dandamrongrak et al., 2003). As for instant rice drying, freezing pretreatment maintained the same textural properties to those of freshly cooked rice, but it had adverse effects on the quality of products resulted in high bulk density and shrinkage (Rewthong et al., 2011).

In short, freezing pretreatment can enhance drying rate and preserve the quality of products. However, the application of freezing pretreatment is very limited partly due to it can't inactivate the enzymes responsible for browning reactions, and probably cause nutrition loss during thawing. In addition, it possess a high operation cost only suitable for some high-value foods.

### 3.2.3 Pulsed electric field

Pulsed electric field (PEF) is one of non-thermal technology, which involves the application of short-duration (from  $\mu\text{s}$  to ms) electric pulses of high-voltage fields usually in the range of 15–80 kV/cm to foods placed between two electrodes (Evrendilek, 2016; Yan et al., 2017). PEF is usually applied on liquid or semisolid foods to inactivate microorganisms and enzymes at ambient and mild temperature conditions, without significantly affecting the original color, flavor, texture, and nutritional value of the food (Barbosa-Cánovas et al., 1999; Ade-Omowaye et al., 2001a). In recent years, it has been proved that PEF induced membrane permeability of cells and tissue disintegration for

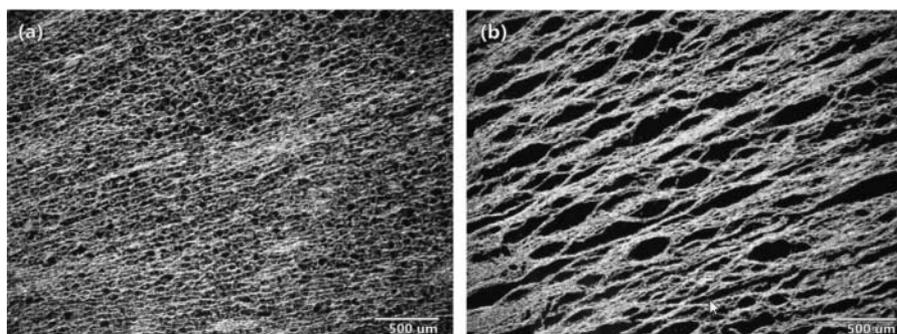

**Figure 4.** Microscopic images of phloem tissue of a fresh sample (a) and a frozen-thawed sample (b). (Ando et al., 2016).

improving mass transfer of plant materials (Knorr et al., 2011), which can be achieved at moderate electric fields of 200–1000 V/cm and short treatment time within  $10^{-4}$ – $10^{-2}$  s (Fincan & Dejmek, 2002; Lebovkaa et al., 2007).

PEF has been utilized to pretreatment of agro-products (Toepfl et al., 2005), and has significant positive effect on enhancing drying process of foods by improving the permeabilization of cell membranes, and preserving food quality attributes by inactivating enzymes or shortening drying time (Amami et al., 2008; Amami et al., 2005; Dev & Raghavan, 2012; Wiktor et al., 2014), as shown in Table 3. PEF pretreatment increased the moisture diffusivity of red beetroot (Shynkaryk et al., 2008), improved the initial drying rate by 26% and reduced the drying time by more than 14% of raphanus sativus (Liu et al., 2016). Moreover, PEF slowed down the enzymatic action of ascorbic acid oxidase (AAO) in carrot purée, thus providing protection against vitamin C oxidation (Leong & Oey, 2014; Liu et al., 2016). It was also observed that the drying time of PEF pretreated red peppers was reduced by 34.7% and the color parameter  $b^*$  was increased by 10% compared to the un-pretreated samples (Won et al., 2014). In addition, it allowed a highly effective inactivation of microorganisms while retaining product quality, contributed to low processing temperature and short residence times (Toepfl et al., 2005).

An application of PEF for food drying pretreatment can increase the drying rate and reduce drying time of more than 20% depending on the products (Ade-Omowaye et al., 2001a). And it provides the tremendous potential to minimize undesirable changes in quality products at lower temperatures and short residence times to retain the fresh-like character and nutritional value of the products (Ranganathan et al., 2015). However, PEF is incapable of inactivating enzymes at conditions adequate for microbial inactivation (50–1000 kJ/kg) (Terefe et al., 2015; Jermann et al., 2015), it also causes cell damage and tissue softening (Faridnia et al., 2015), and the capital equipment costs were expensive (account for 54% of the total production cost) (Li & Farid, 2016), the foods have large particulates or relatively high electrical conductivity are not feasible (Ranganathan et al., 2015). Furthermore, material direct contact with electrode may cause electro-chemical reactions during PEF treatment, trigger corrode electrode and generate toxic substances in turn, and more works are needed to develop corrosion-resistant electrode.

### 3.2.4 High hydrostatic pressure

High hydrostatic pressure (HHP) is an innovative and emerging technology, which is a pressure-based technology. It involves applying a high-pressure shockwave (ranging from 100 to 800 MPa) transmitted through water to materials for a desired dwell time and temperature (Hulle & Rao, 2015; Ueno et al., 2009). When fruits and vegetables are pretreated with HHP, cell permeabilization induced by high-pressure may facilitate the diffusion and provide higher drying rates (Ueno et al., 2009; Al-Khuseibi et al., 2005; Yucel et al., 2010).

The applications of HHP technology prior to drying to decrease the drying time and minimize the deterioration of quality are increasing recently, as summarized in Table 3. Hulle & Rao (2015) showed that, HHP modified the texture of the aloe vera cubes, and by thus enhanced the moisture transfer

rates, decreased in drying time by up to 32% (treated at 400MPa and above), and improved rehydration ability by about 32% (500MPa for 10min) compared to un-pretreated samples. Vega-Gálvez et al. (2011) also found that HHP pretreatment (350 MPa, 30s) increased the water diffusion coefficient by 22%, enhanced the antioxidant activity, modified the microstructure and texture of aloe vera gel. Assisted with osmotic dehydration, HHP has been demonstrated to improve the diffusion coefficients of water and soluble solids and thus in turn accelerated the water loss of samples (Nuñez-Mancilla et al., 2011; Verma et al., 2014; Rastogi et al., 2000). Tedjo et al. (2002) revealed that, the HHP treated mangos had a higher red intensity ( $a^*$  values) and solid gain than the untreated samples.

However, during high pressure processing, plant materials would suffer a great destruction of shape and structure. Hulle & Rao (2015) revealed that, HHP enhanced the firmness of aloe vera cubes with a maximum of up to 21% for the sample treated at 500 MPa for 15 min. Ueno et al. (2009) showed that, tissue softening induced by HHP treatment owned to destruction of cell membranes and partial liberation of cell substances. Besides, the application of HHP systems in industrial scale-up production is hindered by high equipment cost and low products throughput. The equipment cost of HHP systems is account for 59% of the total production cost, and prices of industrial scale HPP units vary from U\$770,000 (55 L) to U\$3,150,000 (420 L) according to a study by Li & Farid (2016). Moreover, more R&D is required to realize commercial application in food industry, such as the inactivation of enzymes by HHP is variable and uncertain, the serious destruction of structure and texture of solid plant materials, as well as pressurized mediums may permeate into foods (Jermann et al., 2015).

### 3.3 Other techniques

Besides, there are also other physical treatments applied on fruits and vegetables before drying, such as peel abrasion, skin puncturing and infrared heating. Matteo et al. (2000) indicated that, superficial abrasion of the grapes peel reduced the drying time by 61%, as compared to untreated grapes. Similarly, Adiletta et al. (2015) also found that the drying time of red grapes with abraded peel was reduced by about 67% and the dried product had higher rehydration capacity compared to untreated grapes. Yong et al. (2004) reported that pinholes and drilled holes improved the drying rate of potato, cassava, dragon fruit and red chilli, and it was increased by the diameter and density of the holes. Zhang et al. (2012) indicated that the drilling hole pretreatment significantly decreased the drying time (16%–31%), and reduce red pigment loss as well as browning of pepper. However, either peel abrasion or skin puncturing is impracticable in industrial scale because the operation processes of both pretreatments are tedious, laborious, and costly.

Infrared radiation energy with specific wavelengths can penetrate into product and directly heat water or desired components to achieve the purposes of blanching and the energy transfer is highly efficient (Nakamura, 1969; Rastogi, 2012). Shewale & Hebbar (2017) observed that infrared radiation pretreatment reduced the drying time of apple slices by nearly 23%, and improved the retention of ascorbic acid and total phenolic content with about 82%–90% and 72%–74%, respectively,

when compared with the samples treated by potassium metabisulphite. Though infrared heating has advantages over conventional heating under similar conditions, such as short heating time, simple and compact equipment, significant energy saving, and inactivating enzymes (Bingol et al., 2014, 2012; Rastogi, 2012), there are drawbacks limit the application of infrared heating pretreatment, such as its poor penetrate deep in product with only a few millimeters below the surface of the sample, and causing serious water loss (up to 49%) of samples (Xiao et al., 2017).

#### 4. Future trends

The novel thermal and non-thermal pretreatments may become the trends of developing of pre-drying treatment technology in the future. However, there are still many aspects need to be improved of these pretreatment techniques:

For novel thermal blanching, such as SSIB, MWB and OH, they are all still in the early stage of development, and usually used on small-scale for test. The most difficult problems hinder large-scale industrial application, are the non-uniform heating, and limited penetration depth of MWB. The temperature control system designs via mathematical modeling should be approached to improve the heating uniformity of blanching equipment, or even suit for complex heterogeneous foods. And with development of computer technology, material science, sensor technology, and online detection technology, there is scope for development of smart control system (Su et al., 2015). Equipped blanching facility with smart control system may realize the dynamic regulating of blanching conditions, minimize the energy consumption and quality deterioration.

For novel non-thermal technologies, such as ultrasonic, PEF and HHP, they have been conducted on small laboratory scales. A novel non-contact ultrasonic technique, corrosion-resistant electrode, and large-scale inexpensive equipment should be developed to meets the requirements of industrial production. Additionally, non-thermal pretreatments fail to efficiently inactivate the oxidases in plant materials, hence, combine with thermal pretreatment can achieve to the enzyme inactivation. Therefore, hybrid technology should be developed to better utilize of these techniques.

It is noted that, non-thermal pretreatments enhance drying process mainly by improving the permeabilization of cell membranes or destroying structure and texture of tissue. Microstructure is a key for revealing the properties changes during processing (Xiao and Gao, 2012). Many of the undesirable quality attributes changes such as brown discoloration, textural changes, off-flavors, nutritional loss are closely related with the microstructure changes during processing (Niamnuy et al., 2014). However, the relationships between microstructure changes and the evolution of macro physic-chemical properties of foods such as texture, color, rehydration ratio, reactions during pretreatment and drying have rarely been reported. Therefore, more investigation is needed to explore the relationships between pretreatments, microstructure, and physic-chemical properties of products so as to provide the opportunity to manage structure formation and tailor functional properties of food by selecting suitable pretreatment technologies and optimize the processing conditions.

#### 5. Conclusions

In the production of dried food, the drying rate is crucial to reduce food quality deterioration and energy requirements. Pretreatment is an important operation commonly employed before drying to increase drying rate, maintain quality, and decrease microbial load of products. Diverse pretreatment techniques reviewed here, all of them have merits and demerits. Osmotic dehydration reduced the initial water content, drying time, as well as energy consumption, but detrimental to product quality, e.g., loss of minerals, vitamins, and pigments substances due to migration from tissue into osmotic solution. Chemical additives dipping techniques have advantages of enhancing drying process and maintaining quality of foods; while the residues in the food may cause food safety problems. Conventional blanching treatments effectively inactivate various enzymes, soften the texture and destroy microorganisms, accordingly enhance the quality and facilitate drying rate. However, it was described as unfavorable since causing undesirable changes of products, viz. loss of texture, soluble nutrients, pigment and aroma. Novel blanching treatments, such as high-humidity hot air impingement blanching, microwave and ohmic blanching could reduce the nutrition loss and are more efficient in comparison. Furthermore, novel non-thermal technologies can be a better alternative to thermal blanching to overcome the drawbacks of heat-sensitive compounds degradation. Nonetheless, the capital and running costs should be involved to evaluate the techno-economics. In order to bridge the gap between laboratory research and industrial applications of different pretreatments technologies, future research needs are discussed and identified.

#### Acknowledgments

This research was supported by the National Natural Science Foundation of China (No.31772026, 31760471, 31360399), the National Key Research and Development Program of China (No.2017YFD0400905), the Project in the National Science & Technology Pillar Program during the Twelfth Five-year Plan Period (2015BAD19B010201), the Chinese Agricultural Research System (CARS-30), and the joint project of China Agricultural University and Xinjiang Agricultural University Program.

#### Funding

The Chinese Agricultural Research System (CARS-30); The National Natural Science Foundation of China (No.31772026, 31760471, 31360399); The Project in the National Science & Technology Pillar Program during the Twelfth Five-year Plan Period (2015BAD19B010201); The National Key Research and Development Program of China (2017YFD0400905).

#### Reference

- Adiletta, G., P. Russo, W. Senadeera, and M. D. Matteo. 2015. Drying characteristics and quality of grape under physical pretreatment. *Journal of Food Engineering* 172:9–18.
- Ade-Omowaye, B. I. O., A. Angersbach, K. A. Taiwo, and D. Knorr. 2001a. Use of pulsed electric field pre-treatment to improve dehydration characteristics of plant based foods. *Trends in Food Science & Technology* 12 (8):285–295.
- Ade-Omowaye, B. I. O., N. K. Rastogi, A. Angersbach, and D. Knorr. 2001b. Effects of high hydrostatic pressure or high intensity electrical

- field pulse pre-treatment on dehydration characteristics of red paprika. *Innovative Food Science & Emerging Technologies* 2 (1):1–7.
- Agüero, M. V., M. R. Ansorena, S. I. Roura, and C. E. Del Valle. 2008. Thermal inactivation of peroxidase during blanching of butternut squash. *LWT-Food Science and Technology* 41 (3):401–407.
- Ahmed, I., I. M. Qazi, and S. Jamal. 2016. Developments in osmotic dehydration technique for the preservation of fruits and vegetables. *Innovative Food Science & Emerging Technologies* 34:29–43.
- Ahmed, M., M. S. Akter, and J. B. Eun. 2010a. Peeling, drying temperatures, and sulphite-treatment affect physicochemical properties and nutritional quality of sweet potato flour. *Food Chemistry* 121 (1):112–118.
- Ahmed, M., M. S. Akter, and J. B. Eun. 2010b. Effect of pretreatments and drying temperatures on sweet potato flour. *International Journal of Food Science and Technology* 45 (4):726–732.
- Albertos, I., A. B. Martín-Diana, M. A. Sanz, J. M. Barat, A. M. Diez, I. Jaime, and D. Rico. 2016. Effect of high pressure processing or freezing technologies as pretreatment in vacuum fried carrot snacks. *Innovative Food Science & Emerging Technologies* 33:115–122.
- Allali, H., L. Marchal, and E. N. Vorobiev. 2010. Blanching of strawberries by ohmic heating: effects on the kinetics of mass transfer during osmotic dehydration. *Food and Bioprocess Technology* 3 (3):406–414.
- Allali, H., L. Marchal, and E. Vorobiev. 2009. Effect of blanching by ohmic heating on the osmotic dehydration behavior of apple cubes. *Drying Technology* 27 (27):739–746.
- Alonso, J., W. Canet, and T. Rodriguez. 1997. Thermal and calcium pretreatment affects texture, pectinesterase and pectic substances of frozen sweet cherries. *Journal of Food Science* 62 (3):511–515.
- Álvarez-Arenas, T. E. G. 2010. Simultaneous determination of the ultrasound velocity and the thickness of solid plates from the analysis of thickness resonances using air-coupled ultrasound. *Ultrasonics* 50 (2):104–109.
- Al-Khuseibi, M. K., S. S. Sablani, and C. O. Perera. 2005. Comparison of water blanching and high hydrostatic pressure effects on drying kinetics and quality of potato. *Drying Technology* 23 (12):2449–2461.
- Amami, E., L. Khezami, E. Vorobiev, and N. Kechaou. 2008. Effect of pulsed electric field and osmotic dehydration pretreatment on the convective drying of carrot tissue. *Drying Technology* 26 (2):231–238.
- Amami, E., E. Vorobiev, and N. Kechaou. 2005. Effect of pulsed electric field on the osmotic dehydration and mass transfer kinetics of apple tissue. *Drying Technology* 23 (3):581–595.
- Ando, Y., Y. Maeda, K. Mizutani, N. Wakatsuki, S. Hagiwara, and H. Nabetani. 2016. Impact of blanching and freeze-thaw pretreatment on drying rate of carrot roots in relation to changes in cell membrane function and cell wall structure. *LWT – Food Science and Technology* 71:40–46.
- Antos, P., A. Kurdziel, S. Sadło, and M. Balawejder. 2013. Preliminary study on the use of ozonation for the degradation of dithiocarbamate residues in the fruit drying process: mancozeb residue in blackcurrant is the example used. *Journal of Plant Protection Research* 53 (1):48–52.
- Araújo, A. C., S. M. Oliveira, I. N. Ramos, T. R. S. Brandão, and C. L. M. Silva. 2016. Influence of pretreatments on quality parameters and nutritional compounds of dried galega kale (*Brassica oleracea* L. var. *acephala*). *Food and Bioprocess Technology* 9 (5):872–881.
- Arevalo, P., M. O. Ngadi, M. I. Bazhal, and G. S. V. Raghavan. 2004. Impact of pulsed electric fields on the dehydration and physical properties of apple and potato slices. *Drying Technology* 22 (5):1233–1246.
- Azoubel, P. M., M. D. A. M. Baima, and M. D. R. Amorim. 2010. Effect of ultrasound on banana cv Pacovan drying kinetics. *Journal of Food Engineering* 97 (2):194–198.
- Azoubel, P. M., Á. A. El-Aouar, R. V. Tonon, L. E. Kurozawa, G. C. Antonio, F. E. X. Murr, and K. J. Park. 2009. Effect of osmotic dehydration on the drying kinetics and quality of cashew apple. *International Journal of Food Science & Technology* 44 (5):980–986.
- Badwaik, L. S., G. Gautam, and S. C. Deka. 2015. Influence of blanching on antioxidant, nutritional and physical properties of bamboo shoot. *Journal of Agricultural Sciences* 10 (3):140–150.
- Bai, J. W., Z. J. Gao, H. W. Xiao, X. T. Wang, and Q. Zhang. 2013a. Polyphenol oxidase inactivation and vitamin C degradation kinetics of Fuji apple quarters by high humidity air impingement blanching. *International Journal of Food Science & Technology* 48 (6):1135–1141.
- Bai, J. W., D. W. Sun, H. W. Xiao, A. S. Mujumdar, and Z. J. Gao. 2013b. Novel high-humidity hot air impingement blanching (HHAIB) pretreatment enhances drying kinetics and color attributes of seedless grapes. *Innovative Food Science & Emerging Technologies* 20 (4):230–237.
- Barbosa-Cánovas, G. V., M. M. Góngora-Nieto, U. R. Pothakamury, and B. G. Swanson. 1999. Preservation of foods with pulsed electric fields. *Preservation of Foods with Pulsed Electric Fields* 5 (Suppl 136):76–155.
- Beck, S. M., H. Sabarez, V. Gaukel, and K. Kai. 2014. Enhancement of convective drying by application of airborne ultrasound – a response surface approach. *Ultrasonics Sonochemistry* 21 (6):2144–2150.
- Belie, N. D., W. Herppich, and J. D. Baerdemaeker. 2000. Turgor changes in red cabbage during mild heat treatment Turgor changes in red cabbage during mild heat treatment. *Plant Biomechanics Conference* 245–253.
- Benlloch-Tinoco, M., M. Igual, D. Rodrigo, and N. Martínez-Navarrete. 2013. Comparison of microwaves and conventional thermal treatment on enzymes activity and antioxidant capacity of kiwifruit puree. *Innovative Food Science & Emerging Technologies* 19 (19):166–172.
- Bermúdez-Aguirre, D., and G. Barbosa-Cánovas. 2016. Chapter 11: Impact of Sonication on Shelf Life, Sensory, and Nutritional Quality of Food. In *Food Processing Technologies: Impact on product attributes*, A. K. Jaiswal edited 233–247. Boca Raton, FL, USA: CRC Press.
- Bingol, G., W. Bei, A. Zhang, Z. Pan, and T. H. Mchugh. 2014. Comparison of water and infrared blanching methods for processing performance and final product quality of french fries. *Journal of Food Engineering* 121 (1):135–142.
- Bingol, G., J. S. Roberts, M. O. Balaban, and Y. O. Devres. 2012. Effect of dipping temperature and dipping time on drying rate and color change of grapes. *Drying Technology* 30 (6):597–606.
- Bingol, G., A. Zhang, Z. Pan, and T. H. Mchugh. 2012. Producing lower-calorie deep fat fried French fries using infrared dry-blanching as pretreatment. *Food Chemistry* 132 (2):686–692.
- Brochier, B., L. D. F. Marczak, and C. P. Z. Noëña. 2015. Osmotic dehydration of yacon using glycerol and sorbitol as solutes: water effective diffusivity evaluation. *Food & Bioprocess Technology* 8 (3):623–636.
- Çakmak, R. Ş., O. Tekeoğlu, H. Bozkır, A. R. Ergün, and T. Baysal. 2016. Effects of electrical and sonication pretreatments on the drying rate and quality of mushrooms. *LWT – Food Science and Technology* 69:197–202.
- Carranza-Concha, J., M. Benlloch, M. M. Camacho, and N. Martínez-Navarrete. 2012. Effects of drying and pretreatment on the nutritional and functional quality of raisins. *Food and Bioprocess Technology* 90 (C2):243–248.
- Chandrasekaran, S., S. Ramanathan, and T. Basak. 2013. Microwave food processing—a review. *Food Research International* 52 (1):243–261.
- Chandra, S., and D. Kumari. 2015. Recent development in osmotic dehydration of fruit and vegetables: a review. *Critical Reviews in Food Science and Nutrition* 55 (4):552–61.
- Cheng, L. S., S. Fang, and M. L. Ruan. 2015. Influence of blanching pretreatment on the drying characteristics of cherry tomato and mathematical modeling. *International Journal of Food Engineering* 11 (2):265–274.
- Chemat, F., Zill-e-Huma, and M. K. Khan. 2011. Applications of ultrasound in food technology: processing, preservation and extraction. *Ultrasonics Sonochemistry* 18 (4):813–835.
- Chen, K., L. Gao, Q. Li, H. R. Li, Y. Zhang, and K. Chen, et al. 2017. Effects of CO<sub>2</sub> pretreatment on the volatile compounds of dried chinese jujube (*Zizyphus jujuba* miller). *Food Sci Technol* doi: 10.1590/1678-457X.2016.
- Ciurzyńska, A., H. Kowalska, K. Czajkowska, and A. Lenart. 2016. Osmotic dehydration in production of sustainable and healthy food. *Trends in Food Science and Technology* 50:186–192.
- Corona, O., F. Torchio, S. Giacosa, S. R. Segade, D. Planeta, V. Gerbi, M. Squadrito, F. Mencarelli, and L. Rolle. 2016. Assessment of postharvest dehydration kinetics and skin mechanical properties of “muscat of alexandria” grapes by response surface methodology. *Food and Bioprocess Technology* 9 (6):1–10.

- Corrêa, J. L. G., S. R. S. Dev, Y. Gariépy, and G. S. V. Raghavan. 2011. Drying of pineapple by microwave-vacuum with osmotic pretreatment. *Drying Technology* 29 (13):1556–1561.
- Corzo, O., and E. R. Gomez. 2004. Optimization of osmotic dehydration of cantaloupe using desired function methodology. *Journal of Food Engineering* 64 (2):213–219.
- Dandamrongrak, R., R. Mason, and G. Young. 2003. The effect of pretreatments on the drying rate and quality of dried bananas. *International Journal of Food Science and Technology* 38 (8):877–882.
- Dandamrongrak, R., G. Young, and R. Mason. 2002. Evaluation of various pre-treatments for the dehydration of banana and selection of suitable drying models. *Journal of Food Engineering* 55 (2):139–146.
- Davoodi, M. G., P. Vijayanand, S. G. Kulkarni, and K. V. R. Ramana. 2007. Effect of different pre-treatments and dehydration methods on quality characteristics and storage stability of tomato powder. *LWT-Food Science and Technology* 40 (10):1832–1840.
- Del, B. C., P. Riso, A. Brambilla, C. Gardana, A. Rizzolo, P. Simonetti, G. Bertolo, D. Klimis-Zacas, and M. Porrini. 2012. Blanching improves anthocyanin absorption from highbush blueberry (*Vaccinium corymbosum* L.) puree in healthy human volunteers: a pilot study. *Journal of Agricultural & Food Chemistry* 60 (36):9298–304.
- Deng, Y., and Y. Zhao. 2008. Effect of pulsed-vacuum and ultrasound on the osmodehydration kinetics and microstructure of apples (Fuji). *Journal of Food Engineering* 85:84–93.
- Deshmukh, A. W., M. N. Varma, K. Y. Chang, and K. L. Wasewar. 2013. Effect of ethyl oleate pretreatment on drying of ginger: characteristics and mathematical modelling. *Journal of Chemistry* 2013, (2013-10-22).
- Dev, S. R. S., T. Padmini, A. Adedeji, Y. Gariépy, and G. S. V. Raghavan. 2008. A comparative study on the effect of chemical, microwave, and pulsed electric pretreatments on convective drying and quality of raisins. *Drying Technology* 26 (10):1238–1243.
- Doymaz, İ. 2004. Effect of dipping treatment on air drying of plums. *Journal of Food Engineering* 64 (4):465–470.
- Doymaz, İ. 2006. Drying kinetics of black grapes treated with different solution. *Journal of Food Engineering* 76 (2):212–217.
- Doymaz, İ. 2007. Influence of pretreatment solution on the drying of sour cherry. *Journal of Food Engineering* 78 (2):591–596.
- Doymaz, İ. 2010. Effect of citric acid and blanching pre-treatments on drying and rehydration of Amasya red apples. *Food and Bioprocess Processing* 88 (2):124–132.
- Doymaz, İ. 2015. Hot-air drying and rehydration characteristics of red kidney bean seeds. *Chemical Engineering Communications* 203 (5):599–608.
- Doymaz, İ., and P. Altiner. 2012. Effect of pretreatment solution on drying and color characteristics of seedless grapes. *Food Science and Biotechnology* 21 (1):43–49.
- Doymaz, İ., H. Demir, and A. Yildirim. 2015. Drying of quince slices: effect of pretreatments on drying and rehydration characteristics. *Chemical Engineering Communications* 202 (10):1271–1279.
- Doymaz, İ., and M. Pala. 2002. The effects of dipping pretreatments on air-drying rates of the seedless grapes. *Journal of Food Engineering* 52 (4):344.
- Doymaz, İ., and Ö. Özdemir. 2014. Effect of air temperature, slice thickness and pretreatment on drying and rehydration of tomato. *International Journal of Food Science and Technology* 49 (2):558–564.
- Du, Z. L., Z. J. Gao, and S. Zhang. 2006. Research on convective heat transfer coefficient with air jet impinging. *Transactions of the Chinese Society of Agricultural Engineering* 22:1–4 (in Chinese with English abstract).
- El-Beltagy, A., G. R. Gamea, and A. H. A. Essa. 2007. Solar drying characteristics of strawberry. *Journal of Food Engineering* 78 (2):456–464.
- Eshtiaghi, M. N., R. Stute, and D. Knorr. 1994. High-pressure and freezing pretreatment effects on drying, rehydration, texture and color of green beans, carrots and potatoes. *Journal of Food Science* 59 (6):1168–1170.
- Esmaili, M., R. Sotudehgharebagh, K. Cronin, M. Mae, and G. Reza zadeh. 2007. Grape drying: a review. *Food Reviews International* 23 (3):257–280.
- Evrendilek, G. A. 2016. Chapter 16: Pulsed Electric Field: Impact on Food Product Attributes. *Food Processing Technologies: Impact on product attributes*. 393–434. Boca Raton, FL, USA: CRC Press.
- Fan, F., M. I. Gallão, and S. Rodrigues. 2008. Effect of osmotic dehydration and ultrasound pre-treatment on cell structure: melon dehydration. *LWT - Food Science and Technology* 41 (4):604–610.
- Faridnia, F., I. Oey, D. Burrirt, and P. Bremer. 2015. Innovative approach to determine the effect of pulsed electric fields on the microstructure of whole potato tubers: use of cell viability, microscopic images and ionic leakage measurements. *Food Research International* 77:556–564.
- FDA. 1986. Food labeling – sulfating agents. *Fed. Regist.* 51:25012–25021.
- Fernandes, F. A. N., and S. Rodrigues. 2007. Ultrasound as pre-treatment for drying of fruits: dehydration of banana. *Journal of Food Engineering* 82 (2):261–267.
- Fernandes, F. A. N., and S. Rodrigues. 2008. Application of ultrasound and ultrasound-assisted osmotic dehydration in drying of fruits. *Drying Technology* 26 (12):1509–1516.
- Filho, L. M., E. C. Frascareli, and M. A. Mauro. 2016. Effect of an edible pectin coating and blanching pretreatments on the air-drying kinetics of pumpkin (*Cucurbita moschata*). *Food and Bioprocess Technology* 9 (5):859–871.
- Fincan, M., and P. Dejmek. 2002. In situ visualization of the effect of a pulsed electric field on plant tissue. *Journal of Food Engineering* 55 (3):223–230.
- Gallego-Juarez, J. A., G. Rodriguez-Corral, J. C. Gálvez Moraleda, and T. S. Yang. 1999. A new high-intensity ultrasonic technology for food dehydration. *Drying Technology* 17 (3):597–608.
- Gamboa-Santos, J., A. Montilla, A. C. Soria, J. A. Cárcel, J. V. García-Pérez, and M. Villamiel. 2014. Impact of power ultrasound on chemical and physicochemical quality indicators of strawberries dried by convection. *Food Chemistry* 161 (6):40–46.
- Garba, U., S. Kaur, S. Gurumayum, and P. Rasane. 2015. Effect of hot water blanching time and drying temperature on the thin layer drying kinetics of and anthocyanin degradation in black carrot (*Daucus carota* L.) shreds. *Food Technology and Biotechnology* 53 (3):324–330.
- Garcíamartínez, E., M. Igual, M. E. Martínezparza, and N. Martíneznavarrete. 2013. Assessment of the bioactive compounds, color, and mechanical properties of apricots as affected by drying treatment. *Food & Bioprocess Technology* 6 (11):3247–3255.
- Gazor, H. R., S. Maadani, and H. Behmadi. 2014. Influence of air temperature and pretreatment solutions on drying time, energy consumption and organoleptic properties of sour cherry. *Agriculturae Conspectus Scientificus* 79 (3):119–124.
- Ghosh, P. K., Y. C. Agrawal, D. S. Jayas, and B. K. Kumbhar. 2006. Process development for osmo-hot air drying of carrot. *Journal of Food Science and Technology* 43 (1):65–68.
- Goullieux, A., and J. P. Pain. 2005. Ohmic Heating. In: *Emerging technologies for food processing* D.-W., Sun (Ed.), 549. Italy: Elsevier Academic Press.
- Grncarevic, M., and J. S. Hawker. 2010. Browning of sultana grape berries during drying. *Journal of the Science of Food & Agriculture* 22 (5):270–272.
- Güçlü, K., M. Altun, M. Özyürek, S. E. Karademir, and R. Apak. 2006. Antioxidant capacity of fresh, sun- and sulphited-dried Malatya apricot (*Prunus armeniaca*) assayed by cuprac, abts/teac and folin methods. *International Journal of Food Science and Technology* 41 (Supplement s1):76–85.
- Guida, V., G. Ferrari, G. Pataro, A. Chambery, A. D. Maro, and A. Parente. 2013. The effects of ohmic and conventional blanching on the nutritional, bioactive compounds and quality parameters of artichoke heads. *LWT - Food Science and Technology* 53 (2):569–579.
- Gunes, G., L. K. Blum, and J. H. Hotchkiss. 2005. Inactivation of yeasts in grape juice using a continuous dense phase carbon dioxide processing system. *Journal of the Science of Food & Agriculture* 85 (14):2362–2368.
- Hiranvarachat, B., S. Devahastin, and N. Chiewchan. 2011. Effects of acid pretreatments on some physicochemical properties of carrot undergoing hot air drying. *Food and Bioprocess Processing* 89 (2):116–127.
- Hong, Z., and H. Lu. 2012. Effect of microwave pretreatment on the kinetics of ascorbic acid degradation and peroxidase inactivation in different parts of green asparagus (*Asparagus officinalis* L.) during water blanching. *Food Chemistry* 128 (4):1087–1093.
- Hulle, N. R. S., and P. S. Rao. 2015. Effect of high pressure pretreatments on structural and dehydration characteristics of aloe vera (*Aloe barbadensis* Miller) cubes. *Drying Technology* 34 (1):105–118.
- Hwang, E. S., J. N. Cash, and M. J. Zabik. 2002. Degradation of mancozeb and ethylenethiourea in apples due to postharvest treatments and processing. *Journal of Food Science* 67 (9):3295–3300.

- Icier, F. 2010. Ohmic blanching effects on drying of vegetable byproduct. *Journal of Food Process Engineering* 33 (4):661–683.
- Icier, F., H. Yildiz, and T. Baysal. 2006. Peroxidase inactivation and colour changes during ohmic blanching of pea puree. *Journal of Food Engineering* 74 (3):424–429.
- Jakób, A., J. Bryjak, H. Wójtowicz, V. Illeová, J. Annus, and M. Polakovič. 2010. Inactivation kinetics of food enzymes during ohmic heating. *Food Chemistry* 123 (2):369–376.
- Jambrak, A. R., T. J. Mason, L. Paniwnyk, and V. Lelas. 2007. Accelerated drying of button mushrooms, Brussels sprouts and cauliflower by applying power ultrasound and its rehydration properties. *Journal of Food Engineering* 81 (1):88–97.
- Jangam, S. V. 2011. An overview of recent developments and some R & D challenges related to drying of foods. *Drying Technol.* 29:1343–1357.
- Jayaraman, K. S., and D. K. D. Gupta. 2006. Drying of fruits and vegetables. In *Handbook of Industrial Drying* A. S., Mujumdar (Ed.), (3rd edition) (pp. 606–634). UK: Taylor & Francis.
- Jermann, C., T. Koutchma, E. Margas, C. Leadley, and V. Ros-Polski. 2015. Mapping trends in novel and emerging food processing technologies around the world. *Innovative Food Science & Emerging Technologies* 31:14–27.
- Jiang, N., C. Liu, D. Li, and Y. Zhou. 2015. Effect of blanching on the dielectric properties and microwave vacuum drying behavior of *Agaricus bisporus* slices. *Innovative Food Science & Emerging Technologies* 30:89–97.
- Joslyn, M. A., and J. B. S. Braverman. 1954. The chemistry and technology of the pretreatment and preservation of fruit and vegetable products with sulphur dioxide and sulphites. *Advances in Food Research* 5 (97):–160.
- Kamiloglu, S., G. Toydemir, D. Boyacioglu, J. Beekwilder, R. D. Hall, and E. Capanoglu. 2016. A review on the effect of drying on antioxidant potential of fruits and vegetables. *Critical Reviews in Food Science and Nutrition* 56 (sup1):110–129.
- Karabulut, I., A. Topcu, A. Duran, S. Turan, and B. Ozturk. 2007. Effect of hot air drying and sun drying on color values and  $\beta$ -carotene content of apricot (*Prunus armenica*, L.). *LWT – Food Science and Technology* 40 (5):753–758.
- Kaur, N., and A. K. Singh. 2016. Ohmic Heating: Concept and Applications—A Review. *Critical reviews in food science and nutrition* 56 (14):2338–2351.
- Kemp, M. R., and P. J. Fryer. 2007. Enhancement of diffusion through foods using alternating electric fields. *Innovative Food Science & Emerging Technologies* 8:143–153.
- Kingsly, R. P., R. K. Goyal, M. R. Manikantan, and S. M. Ilyas. 2007. Effects of pretreatments and drying air temperature on drying behavior of peach slice. *International Journal of Food Science and Technology* 42 (1):65–69.
- Knorr, D., A. Froehling, H. Jaeger, K. Reineke, O. Schlueter, and K. Schoessler. 2011. Emerging technologies in food processing. *Food Science and Technology* 2 (2):203–35.
- Koskiniemi, C. B., V. D. Truong, J. Simunovic, and R. F. Mcfeeters. 2011. Improvement of heating uniformity in packaged acidified vegetables pasteurized with a 915 MHz continuous microwave system. *Journal of Food Engineering* 105 (1):149–160.
- Kowalska, H., A. Lenart, and D. Leszczuk. 2008. The effect of blanching and freezing on osmotic dehydration of pumpkin. *Journal of Food Engineering* 86 (1):30–38.
- Krokida, M. K., C. T. Kiranoudis, Z. B. Maroulis, and D. Marinou-Kouris. 2000. Effect of pretreatment on color of dehydrated products. *Drying Technology* 18 (6):1239–1250.
- Kulshrestha, S. A., and S. K. Sastry. 2006. Low-frequency dielectric changes in cellular food material from ohmic heating: effect of end point temperature. *Innovative Food Science & Emerging Technologies* 7 (4):257–262.
- Lago-Vanzela, E. S., P. D. Nascimento, E. A. F. Fontes, M. A. Mauro, and M. Kimura. 2013. Edible coatings from native and modified starches retain carotenoids in pumpkin during drying. *LWT-Food Science and Technology* 50 (2):420–425.
- Langdon, T. T. 1987. Preventing of browning in fresh prepared potatoes without the use of sulfiting agents. *Food Technology* 41 (5):64.
- Latapi, G., and D. M. Barrett. 2006. Influence of pre-drying treatments on quality and safety of sun-dried tomatoes. I. use of steam blanching, boiling brine blanching, and dips in salt or sodium metabisulfite. *Journal of Food Science* 71 (1):S24–S31.
- Lavelli, V., B. Zanoni, and A. Zaniboni. 2007. Effect of water activity on carotenoid degradation in dehydrated carrots. *Food Chemistry* 104 (4):1705–1711.
- Lebovkaa, N. I., N. V. Shynkaryka, and E. Vorobieva. 2007. Pulsed electric field enhanced drying of potato tissue. *Journal of Food Engineering* 78 (2):606–613.
- Lee, C. Y., M. C. Bourne, and J. P. Buren. 2006. Effect of blanching treatment on the firmness of carrots. *Journal of Food Science* 44 (2):615–616.
- Leeratanarak, N., S. Devahastin, and N. Chiewchan. 2006. Drying kinetics and quality of potato chips undergoing different drying techniques. *Journal of Food Engineering* 77 (3):635–643.
- Leong, S. Y., and I. Oey. 2014. Effect of pulsed electric field treatment on enzyme kinetics and thermostability of endogenous ascorbic acid oxidase in carrots (*Daucus carota*, cv. Nantes). *Food Chemistry* 146 (3):538–547.
- Lewicki, P. P. 1998. Effect of pre-drying treatment, drying and rehydration on plant tissue properties: A review. *International Journal of Food Properties* 1 (1):1–22.
- Li, X., and M. Farid. 2016. A review on recent development in non-conventional food sterilization technologies. *Journal of Food Engineering* 182:33–45.
- Li, Y., and M. Zhao. 2006. Simple methods for rapid determination of sulfite in food products. *Food Control* 17 (12):975–980.
- Lin, S., and M. S. Brewer. 2005. Effects of blanching method on the quality characteristics of frozen peas. *Journal of Food Quality* 28 (4):350–360.
- Liu, L., Y. Wang, D. Zhao, K. An, S. Ding, and Z. Wang. 2014. Effect of carbonic maceration pre-treatment on drying kinetics of chilli (*capsicum annum*, L.) flesh and quality of dried product. *Food & Bioprocess Technology* 7 (9):2516–2527.
- Liu, M. Y., Y. H. Guo, C. P. Zhao, and Z. F. Wang. 2012. Drying and fermentation process optimization of grapes prefermented with carbon dioxide. *Transactions of the Chinese Society of Agricultural Engineering* 28 (12):269–272. (in Chinese)
- Liu, P., A. S. Mujumdar, M. Zhang, and H. Jiang. 2015. Comparison of three blanching treatments on the color and anthocyanin level of the microwave-assisted spouted bed drying of purple flesh sweet potato. *Drying Technology* 33 (1):66–71.
- Liu, P., M. Zhang, and A. S. Mujumdar. 2014. Purple-fleshed sweet potato cubes drying in a microwave-assisted spouted bed dryer. *Drying Technology* 32 (15):1865–1871.
- Liu, Z., Y. Song, Y. Guo, H. Wang, and J. Liu. 2016. Optimization of pulsed electric field pretreatment parameters for preserving the quality of raphanus sativus. *Drying Technology* 34 (6):692–702.
- Manzocco, L., S. Calligaris, D. Mastrocola, M. C. Nicoli, and C. R. Lericci. 2000. Review of non-enzymatic browning and antioxidant capacity in processed foods. *Trends in Food Science and Technology* 11 (9–10):340–346.
- Martínez-Soto, G., R. Ocaña-Camacho, and O. Paredes-López. 2007. Effect of pretreatment and drying on the quality of oyster mushrooms (*Pleurotus Ostreatus*). *Drying Technology* 19 (3–4):661–672.
- Matteo, M. D., L. Cinquanta, G. Galiero, and S. Crescitelli. 2000. Effect of a novel physical pretreatment process on the drying kinetics of seedless grapes. *Journal of Food Engineering* 46 (2):83–89.
- Mercali, G. D., L. D. F. Marczak, I. C. Tessaro, and C. P. Z. Noreña. 2011. Evaluation of water, sucrose and NaCl effective diffusivities during osmotic dehydration of banana (*Musa sapientum*, shum.). *LWT – Food Science and Technology* 44:82–91.
- Mcinerney, J. K., C. A. Seccafien, C. M. Stewart, and A. R. Bird. 2007. Effects of high pressure processing on antioxidant activity, and total carotenoid content and availability, in vegetables. *Innovative Food Science & Emerging Technologies* 8 (4):543–548.
- Miano, A. C., A. Ibarz, and P. E. Augusto. 2015. Mechanisms for improving mass transfer in food with ultrasound technology: describing the phenomena in two model cases. *Ultrasonics Sonochemistry* 29:413–419.
- Mieszczakowska-Fraç, M., B. Dyki, and D. Konopacka. 2016. Effects of ultrasound on polyphenol retention in apples after the application of predrying treatments in liquid medium. *Food and Bioprocess Technology* 9 (3):1–10.

- Miller, F. A., C. L. M. Silva, and T. R. S. Brandão. 2013. A Review on ozone-based treatments for fruit and vegetables preservation. *Food Eng. Rev.* 5:77–106.
- Ministry of Health of the People's Republic of China. National food safety standards in the national standard of the People's Republic of China. GB2760-2011, issued 20-April 2011 (in Chinese).
- Mir, M. A., P. R. Hussain, S. Fouzia, and A. H. Rather. 2009. Effect of sulphiting and drying methods on physico-chemical and sensorial quality of dried apricots during ambient storage. *International Journal of Food Science and Technology* 44 (6):1157–1166.
- Miranda, G., À. Berna, D. Salazar, and A. Mulet. 2009. Sulphur dioxide evolution during apricot storage. *LWT-Food Science and Technology* 42 (2):531–533.
- Mizrahi, S. 1996. Leaching of soluble solids during blanching of vegetables by ohmic heating. *Journal of Food Engineering* 29 (2):153–166.
- Moreno, J., G. Bugue-no, V. Velasco, G. Petzold, and G. Tabilo-Munizaga. 2004. Osmotic dehydration and vacuum impregnation on physico-chemical properties of Chilean papaya (*Carica candamarcensis*). *Journal of Food Science* 69 (3):102–106.
- Mothibe, K. J., M. Zhang, J. Nsor-atindana, and Y. C. Wang. 2011. Use of ultrasound pretreatment in drying of fruits: Drying rates, quality attributes, and shelf life extension. *Drying Technology* 29 (14):1611–1621.
- Mujumdar, A. S. 2006. *Handbook of industrial drying*. 3rd ed. Taylor & Francis Group, Boca Raton (USA): CRC Press.
- Mujumdar, A. S. 2014. Impingement drying. In A. S., Mujumdar (Ed.), *Handbook of Industrial Drying* (fourth edition). UK: Taylor & Francis.
- Mukherjee, S., and P. K. Chattopadhyay. 2007. Whirling bed blanching of potato cubes and its effects on product quality. *Journal of Food Engineering* 78 (1):52–60.
- Nakamura, A. 1969. Application of infra-red radiation in food processing. *Journal of Symbolic Logic* 34 (3):304–304.
- Ndiaye, C., S. Y. Xu, and Z. Wang. 2009. Steam blanching effect on polyphenoloxidase, peroxidase and colour of mango (*Mangifera indica* L.) slices. *Food Chemistry* 113 (1):92–95.
- Neves, F. I. G., M. C. Vieira, and C. L. M. Silva. 2012. Inactivation kinetics of peroxidase in zucchini (*Cucurbita pepo*, L.) by heat and UV-C radiation. *Innovative Food Science & Emerging Technologies* 13 (1):158–162.
- Ngamwonglumlert, L., S. Devahastin, and N. Chiewchan. 2015. Natural colorants: pigment stability and extraction yield enhancement via utilization of appropriate pretreatment and extraction methods. *Critical reviews in food science and nutrition* 57 (15):3243–3259.
- Nguyen, L. T., W. Choi, S. H. Lee, and S. Jun. 2013. Exploring the heating patterns of multiphase foods in a continuous flow, simultaneous microwave and ohmic combination heater. *Journal of Food Engineering* 116 (1):65–71.
- Niamnuy, C., S. Devahastin, and S. Soponronnarit. 2014. Some recent advances in microstructural modification and monitoring of foods during drying: a review. *Journal of Food Engineering* 123 (123):148–156.
- Nieto, A., M. A. Castro, and S. M. Alzamora. 2001. Kinetics of moisture transfer during air drying of blanched and/or osmotically dehydrated mango. *Journal of Food Engineering* 50 (3):175–185.
- Nowacka, M., A. Wiktor, M. Śledź, N. Jurek, and D. Witrowa-Rajchert. 2012. Drying of ultrasound pretreated apple and its selected physical properties. *Journal of Food Engineering* 113 (3):427–433.
- Nowacka, M., and M. Wedzik. 2016. Effect of ultrasound treatment on microstructure, colour and carotenoid content in fresh and dried carrot tissue. *Applied Acoustics* 103 (2):163–171.
- Novaković, M. M., S. M. Stevanović, S.Ž. Gorjanović, P. M. Jovanovic, P. M. Jovanovic, M. A. Janković, and D. Ž. Sužnjević. 2011. Changes of hydrogen peroxide and radical-scavenging activity of raspberry during osmotic, convective, and freeze-drying. *Journal of Food Science* 76 (4): C663–C668.
- Núñez-Mancilla, Y., M. Perez-Won, A. Vega-Gálvez, V. Arias, G. Tabilo-Munizaga, V. Briones-Labarca, R. Lemus-Mondaca, and K. D. Scala. 2011. Modeling mass transfer during osmotic dehydration of strawberries under high hydrostatic pressure conditions. *Innovative Food Science & Emerging Technologies* 12 (3):338–343.
- Omolola, A. O., A. I. Jideani, and P. F. Kapila. 2017. Quality properties of fruits as affected by drying operation. *Critical reviews in food science and nutrition* 57 (1):95–108.
- Oliveira, S. M., T. R. S. Brandão, and C. L. M. Silva. 2015. Influence of drying processes and pretreatments on nutritional and bioactive characteristics of dried vegetables: a review. *Food Engineering Reviews* 8 (2):1–30.
- Olivera, D. F., S. Z. Viña, C. M. Marani, R. M. Ferreyra, A. Mugridge, A. R. Chaves, and R. H. Mascheroni. 2008. Effect of blanching on the quality of Brussels sprouts (*Brassica oleracea*, L. *gemmifera*, DC) after frozen storage. *Journal of Food Engineering* 84 (1):148–155.
- Oliveira, L. F. D., J. L. G. Corrêa, M. C. D. A. Pereira, A. D. L. S. Ramos, and M. B. Vilela. 2016. Osmotic dehydration of yacon (*Smallanthus sonchifolius*): optimization for fructan retention. *LWT – Food Science and Technology* 71:77–87.
- Ozdemir, Y., A. Ozturk, and S. Tüfekçi. 2016. Effect of two dipping pretreatment on drying kinetics of golden berry (*Physalis peruviana* L.). *African Journal of Agricultural Research* 11 (1):40–47.
- Pan, Z., C. Shih, T. H. Mchugh, and E. Hirschberg. 2008. Study of banana dehydration using sequential infrared radiation heating and freeze-drying. *LWT – Food Science and Technology* 41 (10):1944–1951.
- Paniwnyk, L. 2016. Chapter 10: Application of Ultrasound to Aid Food Processing. *Food Processing Technologies: Impact on product attributes*, 207–227. Boca Raton, FL, USA: CRC Press.
- Pattanapa, K., N. Therdthai, W. Chantrapornchai, and W. Zhou. 2010. Original article: effect of sucrose and glycerol mixtures in the osmotic solution on characteristics of osmotically dehydrated mandarin cv. (Sai-Namphaung). *International Journal of Food Science & Technology* 45 (9):1918–1924.
- Peshkovsky, A. S., S. L. Peshkovsky, and S. Bystryak. 2013. Scalable high-power ultrasonic technology for the production of translucent nanocemulsions. *Chemical Engineering & Processing* 69 (3):77–82.
- Pimpaporn, P., S. Devahastin, and N. Chiewchan. 2007. Effects of combined pretreatments on drying kinetics and quality of potato chips undergoing low-pressure superheated steam drying. *Journal of Food Engineering* 81 (2):318–329.
- Popkin, B. M., L. S. Adair, S. W. Ng. 2012. Global nutrition transition and the pandemic of obesity in developing countries. *Nutrition Reviews* 70:3–21.
- Rahath Kubra, I., D. Kumar, and L. Jagan Mohan Rao. 2016. Emerging Trends in Microwave Processing of Spices and Herbs. *Critical reviews in food science and nutrition* 56 (13):2160–2173.
- Ranganathan, K., V. Subramanian, and N. Shanmugam. 2015. Effect of thermal and nonthermal processing on textural quality of plant tissues. *Critical Reviews in Food Science and Nutrition* 56 (16):2665–2694.
- Ranjan, S., N. Dasgupta, N. Walia, C. T. Chand, and C. Ramalingam. 2016. Microwave Blanching: An Emerging Trend in Food Engineering and its Effects on *Capsicum annum* L. *Journal of Food Process Engineering* doi:10.1111/jfpe.12411.
- Raoult-Wack, A. L. 1994. Recent advances in the osmotic dehydration of foods. *Trends in Food Science & Technology* 5 (8):255–260.
- Rastogi, N. K. 2011. Opportunities and challenges in application of ultrasound in food processing. *Critical Reviews in Food Science and Nutrition* 51 (8):705–22.
- Rastogi, N. K. 2012. Recent trends and developments in infrared heating in food processing. *Critical Reviews in Food Science and Nutrition* 52 (9):737–760.
- Rastogi, N. K., A. Angersbach, and D. Knorr. 2000. Synergistic effect of high hydrostatic pressure pretreatment and osmotic stress on mass transfer during osmotic dehydration. *Journal of Food Engineering* 45 (1):25–31.
- Rastogi, N. K., K. S. M. S. Raghavarao, K. Niranjana, and D. Knorr. 2002. Recent developments in osmotic dehydration: methods to enhance mass transfer. *Trends in Food Science and Technology* 13 (2):48–59.
- Regier, M., and H. Schubert. 2001. Microwave processing. In: P., Richardson (Ed.). *Thermal Technologies in Food Processing* (pp. 178–207). Cambridge, England: Woodhead Publishing Limited.
- Rewthong, O., S. Soponronnarit, C. Taechapairoj, P. Tungtrakul, and S. Prachayawarakorn. 2011. Effects of cooking, drying and pretreatment methods on texture and starch digestibility of instant rice. *Journal of Food Engineering* 103 (3):258–264.
- Rodrigues, S., and F. A. N. Fernandes. 2007a. Dehydration of melons in a ternary system followed by air-drying. *Journal of Food Engineering* 80 (2):678–687.

- Rodrigues, S., and F. A. N. Fernandes. 2007b. Use of ultrasound as pretreatment for dehydration of Melons. *Drying Technology* 25 (10):1791–1796.
- Roy, M. K., L. R. Juneja, S. Isobe, and T. Tsushida. 2009. Steam processed broccoli (*Brassica oleracea*) has higher antioxidant activity in chemical and cellular assay systems. *Food Chemistry* 114 (1):263–269.
- Ruiz-López, I. I., I. R. Huerta-Mora, M. A. Vivar-Vera, C. E. Martínez-Sánchez, and E. Herman-Lara. 2010. Effect of osmotic dehydration on air-drying characteristics of chayote. *Drying Technology* 28 (10):1201–1212.
- Ruiz-Ojeda, L. M., and F. J. Peñas. 2013. Comparison study of conventional hot-water and microwave blanching on quality of green beans. *Innovative Food Science & Emerging Technologies* 20 (4):191–197.
- Sacilik, K., A. K. Elicin, and G. Unal. 2006. Drying kinetics of Üryani plum in a convective hot-air dryer. *Journal of Food Engineering* 76 (3):362–368.
- Sakr, M., and S. Liu. 2014. A comprehensive review on applications of ohmic heating (OH). *Renewable and Sustainable Energy Reviews* 39:262–269.
- Salengke, S., and S. K. Sastry. 2005. Effect of ohmic pretreatment on the drying rate of grapes and adsorption isotherm of raisins. *Drying Technology* 23 (3):551–564.
- Sarkis, J. R., D. P. Jaeschke, I. C. Tessaro, and L. D. F. Marczak. 2013. Effects of ohmic and conventional heating on anthocyanin degradation during the processing of blueberry pulp. *LWT – Food Science and Technology* 51 (1):79–85.
- Schössler, K., H. Jäger, and D. Knorr. 2012. Effect of continuous and intermittent ultrasound on drying time and effective diffusivity during convective drying of apple and red bell pepper. *Journal of Food Engineering* 108 (1):103–110.
- Schieber, A., F. C. Stintzing, and R. Carle. 2001. By-products of plant food processing as a source of functional compounds—recent developments. *Trends in Food Science and Technology* 12 (11):401–413.
- Serratos, M. P., A. Lopez-Toledano, M. Medina, and J. Merida. 2008. Drying of Pedro Ximenez grapes in chamber at controlled temperature and with dipping pretreatments. Changes in the color fraction. *Journal of Agricultural & Food Chemistry* 56 (22):10739–46.
- Severini, C., A. Baiano, T. D. Pilli, B. F. Carbone, and A. Derossi. 2005. Combined treatments of blanching and dehydration: study on potato cubes. *Journal of Food Engineering* 68 (3):289–296.
- Sezer, D. B., and A. Demirdöven. 2015. The effects of microwave blanching conditions on carrot slices: optimization and comparison. *Journal of Food Processing & Preservation* 39 (6):2188–2196.
- Shewale, S. R., and H. U. Hebbar. 2017. Effect of infrared pretreatment on low-humidity air drying of apple slices. *Drying Technology* 35 (4):490–499.
- Shi, J., Z. Pan, T. H. Mchugh, D. Wood, Y. Zhu, R. J. Avena Bustillos, and E. Hirschberg. 2008. Effect of berry size and sodium hydroxide pretreatment on the drying characteristics of blueberries under infrared radiation heating. *Journal of Food Science* 73 (6):259–265.
- Shirsat, N., J. G. Lyng, N. P. Brunton, and B. McKenna. 2004. Ohmic processing: Electrical conductivities of pork cuts. *Meat Science* 67:507–514.
- Shynkaryk, M. V., N. I. Lebovka, and E. Vorobiev. 2008. Pulsed electric fields and temperature effects on drying and rehydration of red beet-roots. *Drying Technology* 26 (6):695–704.
- Shyu, S. L., and L. S. Hwang. 2001. Effects of processing conditions on the quality of vacuum fried apple chips. *Food Research International* 34 (3):133–142.
- Singh, B., P. S. Panesar, V. Nanda, and J. F. Kennedy. 2010. Optimisation of osmotic dehydration process of carrot cubes in mixtures of sucrose and sodium chloride solutions. *Food Chemistry* 123 (3):590–600.
- Singh, S., C. S. Raina, A. S. Bawa, and D. C. Saxena. 2006. Effect of pretreatments on drying and rehydration kinetics and color of sweet potato slices. *Drying Technology* 24 (11):1487–1494.
- Siucińska, K., D. Konopacka, M. Mieszczakowska-Fraç, and A. Połubok. 2016. The effects of ultrasound on quality and nutritional aspects of dried sour cherries during shelf-life. *LWT-Food Science and Technology* 68:168–173.
- Sledz, M., A. Wiktor, K. Rybak, M. Nowacka, and D. Witrowa-Rajchert. 2016. The impact of ultrasound and steam blanching pre-treatments on the drying kinetics, energy consumption and selected properties of parsley leaves. *Applied Acoustics* 103 (B):148–156.
- Specht, E. 2014. Chapter 1: Impinging jet drying. In *Modern Drying Technology, Volume 5: Process intensification* E. Tsotsas & A. S. Mujumdar (Eds.), (pp. 1–26). Weinheim, Germany: Printed in 2014 by Wiley-VCH.
- Spigno, G. 2016. Chapter 8: Microwave Processing: Impact on Food Product Quality Attributes. In *Food Processing Technologies: Impact on product attributes* A. K. Jaiswal edited. 79–91. Boca Raton, FL, USA: CRC Press.
- Sripinyowanich, J., and A. Noomhorm. 2013. Effects of freezing pretreatment, microwave-assisted vibro-fluidized bed drying and drying temperature on instant rice production and quality. *Journal of Food Processing & Preservation* 37 (4):314–324.
- Stehfest, E. 2014. Food choices for health and planet. *Nature* 515 (7528):501–502.
- Stojanovic, J., and J. L. Silva. 2007. Influence of osmotic concentration, continuous high frequency ultrasound and dehydration on antioxidants, colour and chemical properties of rabbiteye blueberries. *Food Chemistry* 101 (3):898–906.
- Tabtiang, S., S. Prachayawarakon, and S. Soponronnarit. 2012. Effects of osmotic treatment and superheated steam puffing temperature on drying characteristics and texture properties of banana Slices. *Drying Technology* 30 (30):20–28.
- Taylor, S. L., N. A. Higley, and R. K. Bush. 1986. Sulfites in foods, uses, analytical methods, residues, fate, exposure assessment, metabolism, toxicity and hypersensitivity. *Advances in Food Research* 30:1–76.
- Tao, Y., and D. W. Sun. 2015. Enhancement of food processes by ultrasound: a review. *Critical Reviews in Food Science and Nutrition* 55 (4):570–594.
- Tao, Y., P. Wang, Y. Wang, S. U. Kadam, Y. Han, J. Wang, and J. Zhou. 2016. Power ultrasound as a pretreatment to convective drying of mulberry (*Morus alba* L.) leaves: impact on drying kinetics and selected quality properties. *Ultrasonics Sonochemistry* 31:310–318.
- Tarhan, S. 2007. Selection of chemical and thermal pretreatment combination for plum drying at low and moderate drying air temperatures. *Journal of Food Engineering* 79 (1):255–260.
- Tatemoto, Y., T. Mibu, Y. Yokoi, and A. Hagimoto. 2015. Effect of freezing pretreatment on the drying characteristics and volume change of carrots immersed in a fluidized bed of inert particles under reduced pressure. *Journal of Food Engineering* 173:150–157.
- Teles, U. M., F. A. Fernandes, S. Rodrigues, A. S. Lima, G. A. Maia, and R. W. Figueiredo. 2006. Optimization of osmotic dehydration of melons followed by air-drying. *International journal of food science & technology* 41 (6):674–680.
- Tedjo, W., K. A. Taiwo, M. N. Eshtiaghi, and D. Knorr. 2002. Comparison of pretreatment methods on water and solid diffusion kinetics of osmotically dehydrated mangos. *Journal of Food Engineering* 53 (2):133–142.
- Terefe, N. S., R. Buckow, and C. Versteeg. 2015. Quality-related enzymes in plant-based products: effects of novel food processing technologies part 2: pulsed electric field processing. *Critical reviews in food science and nutrition* 55 (1):1–15.
- Tesniere, C., and C. Flanzy. 2011. Carbonic maceration wines: characteristics and winemaking process. *Advances in Food & Nutrition Research* 63 (1):1–15.
- Tilman, D., M. Clark. 2014. Global diets link environmental sustainability and human health. *Nature* 515 (7528):518–522.
- Toepfl, S., V. Heinz, and D. Knorr. 2005. Chapter 4: Overview of pulsed electric field processing for food. In *Emerging Technologies for Food processing* D. W., Sun edited, 69–97. London, UK: Elsevier.
- Torreggiani, D. 1993. Osmotic dehydration in fruit and vegetables. *Food Research International* 26 (1):59–68.
- Trirattanapikul, W., and S. Phoungchandang. 2014. Microwave blanching and drying characteristics of *Centella asiatica* (L.) urban leaves using tray and heat pump-assisted dehumidified drying. *Journal of Food Science and Technology* 51 (12):3623–3634.
- Turgut, S. S., E. Kucukoner, and E. Karacabey. 2017. Improvements in drying characteristics and quality parameters of tomato by carbonic maceration pretreatment. *Journal of Food Processing and Preservation*. doi: 10.1111/jfpp.13282.
- Ueno, S., T. Izumi, and T. Fujii. 2009. Estimation of damage to cells of Japanese radish induced by high pressure with drying rate as index. *Bioscience Biotechnology and Biochemistry* 73 (8):1699–1703.

- Valdez-Fragoso, A., S. I. Martínez-Monteagudo, F. Salais-Fierro, J. Welti-Chanes, and H. Mújica-Paz. 2007. Vacuum pulse-assisted pickling whole jalapeño pepper optimization. *Journal of food engineering* 79 (4):1261–1268.
- Volden, J., G. I. A. Borge, M. Hansen, T. Wicklund, and G. B. Bengtsson. 2009. Processing (blanching, boiling, steaming) effects on the content of glucosinolates and antioxidant-related parameters in cauliflower (*Brassica oleracea*, L. ssp. *botrytis*). *LWT – Food Science and Technology* 42 (1):63–73.
- Van Hal, M. 2000. Quality of sweet potato flour during processing and storage. *Journal of Food Reviews International* 16 (16):1–37.
- Vásquez-Caicedo, A. L., S. Schilling, R. Carle, and S. Neidhart. 2007. Effects of thermal processing and fruit matrix on  $\beta$ -carotene stability and enzyme inactivation during transformation of mangoes into purée and nectar. *Food Chemistry* 102 (4):1172–1186.
- Vásquez-Parra, J. E., C. I. Ochoa-Martínez, and M. Bustos-Parra. 2014. Effect of chemical and physical pretreatments on the convective drying of Cape gooseberry fruits (*Physalis peruviana*). *Journal of Food Engineering* 119 (3):648–654.
- Varghese, K. S., M. C. Pandey, K. Radhakrishna, A. S. Bawa. 2014. Technology, applications and modelling of ohmic heating: a review. *Journal of Food Science and Technology* 51 (10):2304–2317.
- Vega-Gálvez, A., R. Lemus-Mondaca, C. Bilbao-Sáinz, P. Fito, and A. Andrés. 2008. Effect of air drying temperature on the quality of rehydrated dried red bell pepper (var. Lamuyo). *Journal of Food Engineering* 85 (1):42–50.
- Vega-Gálvez, A., E. Uribe, M. Perez, G. Tabilo-Munizaga, J. Vergara, P. Garcia-Segovia, E. Lara, and K. D. Scala. 2011. Effect of high hydrostatic pressure pretreatment on drying kinetics, antioxidant activity, firmness and microstructure of aloe vera (*Aloe barbadensis* Miller) gel. *LWT – Food Science and Technology* 44 (2):384–391.
- Verma, D., N. Kaushik, and P. S. Rao. 2014. Application of high hydrostatic pressure as a pretreatment for osmotic dehydration of banana slices (*Musa cavendishii*) finish-dried by dehumidified air drying. *Food and Bioprocess Technology* 7 (5):1281–1297.
- Vikram, V. B., M. N. Ramesh, and S. G. Prapulla. 2005. Thermal degradation kinetics of nutrients in orange juice heated by electromagnetic and conventional methods. *Journal of Food Engineering* 69 (1):31–40.
- Wang, J., X. M. Fang, A. S. Mujumdar, J. Y. Qian, Q. Zhang, X. H. Yang, Y. H. Liu, Z. J. Gao, and H. W. Xiao. 2017a. Effect of high-humidity hot air impingement blanching (HHAB) on drying and quality of red pepper (*Capsicum annum*, L.). *Food Chemistry* 220:145–152.
- Wang, J., X. H. Yang, A. S. Mujumdar, D. Wang, J. H. Zhao, X. M. Fang, Q. Zhang, L. Xie, Z. J. Gao, and H. W. Xiao. 2017b. Effects of various blanching methods on weight loss, enzymes inactivation, phytochemical contents, antioxidant capacity, ultrastructure and drying kinetics of red bell pepper (*Capsicum annum* L.). *LWT-Food Science and Technology* 77:337–347.
- Wang, R., M. Zhang, and A. S. Mujumdar. 2010. Effect of osmotic dehydration on microwave freeze-drying characteristics and quality of potato chips. *Drying Technology* 28 (6):798–806.
- Wang, Y., H. Tao, J. Yang, K. An, S. Ding, D. Zhao, and Z. F. Wang. 2014. Effect of carbonic maceration on infrared drying kinetics and raisin qualities of red globe (*Vitis vinifera* L.): a new pre-treatment technology before drying. *Innovative Food Science & Emerging Technologies* 26:462–468.
- Weil, M., A. S. C. Sing, J. M. Méot, R. Boulanger, and P. Bohuon. 2017. Impact of blanching, sweating and drying operations on pungency, aroma and color of Piper borbonense. *Food Chemistry* 219:274–281.
- Westhoek, H., J. P. Lesschen, T. Rood, S. Wagner, A. De Marco, D. Murphy-Bokern, A. Leip, H. Van Grinsvena, M. A. Sutton, and O. Oenema. 2014. Food choices, health and environment: effects of cutting Europe's meat and dairy intake. *Global Environmental Change* 26:196–205.
- Wiktor, A., M. Śledź, M. Nowacka, T. Chudoba, and D. Witrowa-Rajchert. 2014. Pulsed electric field pretreatment for osmotic dehydration of apple tissue: experimental and mathematical modeling studies. *Drying Technology* 32 (2):408–417.
- Wiktor, A., M. Iwaniuk, M. Śledź, M. Nowacka, T. Chudoba, and D. W. Rajchert. 2013. Drying kinetics of apple tissue treated by pulsed electric field. *Drying Technology* 31 (1):112–119.
- Won, Y. C., S. C. Min, and D. U. Lee. 2015. Accelerated drying and improved color properties of red pepper by pretreatment of pulsed electric fields. *Drying Technology* 33 (8):926–932(7).
- Xiao, H. W., J. W. Bai, D. W. Sun, and Z. J. Gao. 2014. The application of superheated steam impingement blanching (SSIB) in agricultural products processing – a review. *Journal of Food Engineering* 132 (1):39–47.
- Xiao, H. W., Z. J. Gao. 2012. Chapter 11: The application of Scanning Electron Microscope (SEM) to study the microstructure changes in the field of agricultural products drying. In *The Scanning Electron Microscope* edited by Dr. V. Kazmiruk. 213–226 Rijeka, Croatia: INTECH Press.
- Xiao, H. W., H. Lin, X. D. Yao, Z. L. Du, L. Zheng, and Z. J. Gao. 2009. Effects of different pretreatments on drying kinetics and quality of sweet potato bars undergoing air impingement drying. *International Journal of Food Engineering* 5 (5):64–67.
- Xiao, H. W., Z. Pan, L. Z. Deng, H. M. El-Mashad, X. H. Yang, A. S. Mujumdar, Z. J. Gao, and Q. Zhang. 2017. Recent developments and trends in thermal blanching – a comprehensive review. *Information Processing in Agriculture* 4 (2):101–127.
- Xiao, H. W., J. Wang, J. W. Bai, and Z. J. Gao. 2016. Chapter 5: Novel High-Humidity Hot Air Impingement Blanching in Agricultural Products Processing. In *Food Processing Technologies: Impact on product attributes*, A. K. jaiswal edited, 79–91. Boca Raton, FL, USA: CRC Press.
- Xiao, H. W., X. D. Yao, H. Lin, W. X. Yang, J. S. Meng, and Z. J. Gao. 2012. Effect of SSB (superheated steam blanching) time and drying temperature on hot air impingement drying kinetics and quality attributes of yam slices. *Journal of Food Process Engineering* 35 (3):370–390.
- Yong, C. K., M. R. Islam, and A. S. Mujumdar. 2006. Mechanical means of enhancing drying rates: Effect on drying kinetics and quality. *Drying technology* 24 (3):397–404.
- Yu, Y., T. Z. Jin, and G. Xiao. 2017. Effects of pulsed electric fields pretreatment and drying method on drying characteristics and nutritive quality of blueberries. *Journal of Food Processing & Preservation* DOI: 10.1111/jfpp.13303.
- Yucel, U., H. Alpas, and A. Bayindirli. 2010. Evaluation of high pressure pretreatment for enhancing the drying rates of carrot, apple, and green bean. *Journal of Food Engineering* 98 (2):266–272.
- Zhang, Q., H. W. Xiao, X. H. Yang, J. W. Bai, Z. Lou, and Z. J. Gao. 2012. Effects of pretreatment on air impingement drying characteristics and product color for line pepper. *Transactions of the Chinese Society of Agricultural Engineering* 2012, 28 (1):276–281 (in Chinese with English abstract).
- Zhao, D., Y. Wang, Y. Zhu, and Y. Ni. 2016. Effect of carbonic maceration pre-treatment on drying behavior and physicochemical compositions of sweet potato dried with intermittent or continuous microwave. *Drying Technology An International Journal* 34:1604–1612.
- Zhao, H. Y., X. M. Fang, J. Wang, H. Y. Ju, Y. Zhang, X. Chen, Q. Zhang, Y. H. Liu, Z. J. Gao, and H. W. Xiao. 2016. Effect of ethanol dipping pretreatment on drying characteristics and quality of eggplant slices. *Transactions of the Chinese Society of Agricultural Engineering* 32 (9):233–240 (in Chinese with English abstract).
- Zhao, S., O. D. Baik, Y. J. Choi, and S. M. Kim. 2014. Pretreatments for the efficient extraction of bioactive compounds from plant-based biomaterials. *Critical reviews in food science and nutrition* 54 (10):1283–1297.
- Zhao, W., R. Yang, and H. Q. Zhang. 2012. Recent advances in the action of pulsed electric fields on enzymes and food component proteins. *Trends in Food Science and Technology* 27 (2):83–96.
- Zheng, H., and H. Lu. 2011. Effect of microwave pretreatment on the kinetics of ascorbic acid degradation and peroxidase inactivation in different parts of green asparagus (*Asparagus officinalis* L.) during water blanching. *Food chemistry* 128 (4):1087–1093.
- Zhong, T., and M. Lima. 2003. The effect of ohmic heating on vacuum drying rate of sweet potato tissue. *Bioresource Technology* 87:215–220.
- Zhu, Y. I., Z. Pan, and T. H. Mchugh. 2007. Effect of dipping treatments on color stabilization and texture of apple cubes for infrared dry-blanching process. *Journal of Food Processing and Preservation* 31 (5):632–648.
- Zou, K., J. Teng, L. Huang, X. Dai, and B. Wei. 2013. Effect of osmotic pretreatment on quality of mango chips by explosion puffing drying. *LWT – Food Science and Technology* 51 (1):253–259.